



OSMO TINTING SYSTEM

3 ABOUT OSMO

4 TINTING SYSTEM OVERVIEW

INTERIOR WOOD FINISHES

5-6 POLYX®-OIL ORIGINAL

Add a subtle tint of colour. Recommended for many interior wooden surfaces; floors, furniture, worktops, and more.

7-8 POLYX®-OIL RAPID

A quicker drying version of the Original. Recommended for many interior wooden surfaces; floors, furniture, worktops, and more.

9-12 WOOD WAX FINISH

An endless variety of colour choice with varied intensity. Recommended for all interior wooden surfaces; floors, furniture, walls, ceilings, and more.

13-14 OIL STAIN

Professional results with variable intensity of colour. Recommended for interior wooden surfaces; flooring, furniture, stairs, etc.

EXTERIOR WOOD FINISHES

15-18 UV-PROTECTION OIL & UV-PROTECTION OIL EXTRA

Add a subtle tint of colour. Recommended for all vertically structured exterior wooden surfaces; cladding, fencing, garden buildings, pergolas, and more.

19-20 DECKING-OIL

Colours especially suited to preserve the natural colour and characteristics of wood species used for exterior decking and furniture.

21-22 NATURAL OIL WOODSTAIN

An endless variety of colour choice. Recommended for all exterior wooden surfaces; cladding, fencing, garden buildings, and more.

25-26 COUNTRY SHADES

Endless opaque colour choices. Recommended for many exterior wooden surfaces; garden buildings, cladding, fencing, play equipment, and more.



ABOUT OSMO

Osmo is the specialist when it comes to an optimal interplay between wood and coating systems. The careful handling of natural resources combined with offering the best value for money, the best workability and high product coverage is what lies near and dear to our hearts.

Osmo coating systems utilise only a minimal amount of solvents, thanks to the High Solid formula. This results in reduced solvent emissions during application while delivering extended wood surface coverage as well as enhancing the longevity and the durability of the wood finish.

Deep research and development into colour has enabled Osmo to offer a vast range of new colour, creating a tailored experience for each individual. With high solid, high quality and high coverage – Osmo has the solution.



TINTING SYSTEM OVERVIEW

The Osmo Tinting System becomes possible with an automatic paint dispenser to efficiently produce high quality interior and exterior Osmo natural wood finishes from an endless variety of transparent and opaque colours.





POLYX®-OIL ORIGINAL

Extremely hardwearing and durable for many interior wooden surfaces (with exception to ingredient-rich wood species) e.g. flooring, furniture and joinery.



CHOOSE YOUR COLOUR

The standard colours are slightly tinted and transparent, allowing the wood's natural grain to remain visible after application.



3040 WHITE

3044 RAW



3067 LIGHT GREY



3071 HONEY



3072 AMBER



3073 TERRA



3074 GRAPHITE



3075 BLACK

ADDITIONAL COLOURS

Alternatively, choose a colour from the UV-Protection Oil standard colour range as seen below, such as 425 Oak and 428 Red Cedar.



424 SPRUCE



425 OAK



426 LARCH



427 DOUGLAS FIR



428 RED CEDAR



429 NATURAL



431 LIGHT RED CEDAR



432 LIGHT OAK



Available in the following gloss levels.









GLOSSY SATIN SEMI-MATT MATT



POLYX®-OIL RAPID

Extremely hardwearing and durable for many interior wooden surfaces (with exception to ingredient-rich wood species) e.g. flooring, furniture and joinery.



CHOOSE YOUR COLOUR

The standard colours are slightly tinted and transparent, allowing the wood's natural grain to remain visible after application.



3040 WHITE



3044 RAW



3067 LIGHT GREY



3071 HONEY



3072 AMBER



3073 TERRA



3074 GRAPHITE



3075 BLACK

ADDITIONAL COLOURS

Alternatively, choose a colour from the UV-Protection Oil standard colour range as seen below, such as 425 Oak and 428 Red Cedar.



424 SPRUCE



425



426 LARCH



427 DOUGLAS FIR



428 RED CEDAR



429 NATURAL



431 LIGHT RED CEDAR



432 LIGHT OAK

Available in the following gloss levels.






SATIN

MATT



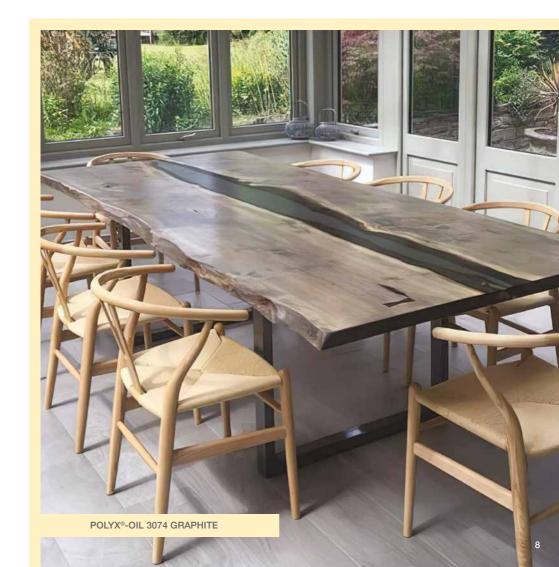

WOOD WAX FINISH

Extremely hardwearing and durable for all interior wooden surfaces (with exception to ingredient-rich wood species) e.g. flooring*, furniture and joinery, walls, ceilings, and more.

*Only one coat of Wood Wax Finish is recommended on flooring, followed by a clear Polyx®-Oil.



CHOOSE YOUR COLOUR

The standard colours are slightly tinted, transparent and intensive, allowing the wood's natural grain to remain visible after application. However for the intensive colours, these characteristics become hidden after the second coat offering an opaque colour finish.



ADDITIONAL COLOURS

Alternatively, choose a colour from any of the other standard colour ranges within this brochure, such as Polyx®-Oil 3071 Honey, UV-Protection Oil 425 Oak, Decking-Oil 009 Larch, and Natural Oil Woodstain 732 Light Oak.



3071 HONEY



3073 TERRA



425 OAK



427 DOUGLAS FIR



009 LARCH



013 GARAPA



712 EBONY



732 LIGHT OAK



ELEMENTS® COLOURS

Wood Wax Finish can be mixed to any of the 120 opaque colours from the Elements® colour range, which are inspired by the four elements of nature; air, earth, fire, and water. More information and colours on page 21.

RAL, BS & NCS COLOURS

More than 2000 additional opaque colours are available to choose from. RAL Classic and BS 4800 colours are available immediately. NCS, RAL Design, and many more are available upon request. Please note pearl, luminous, and metallic colours are not possible.



3 CHOOSE YOUR FINISH



SATIN







OIL STAIN

Professional results with variable intensity of colour for interior wooden surfaces such as flooring*, furniture, stairs, etc.

*For flooring, Oil Stain requires a clear top coat of Polvx®-Oil to create a durable surface.



CHOOSE YOUR COLOUR


The standard colours are slightly tinted, transparent (one coat) and intensive (two coats) colours allowing the wood's natural grain to remain visible after application. If a stronger colour is desired, apply two coats of Oil Stain to achieve an almost-opaque intensive colour.







SATIN

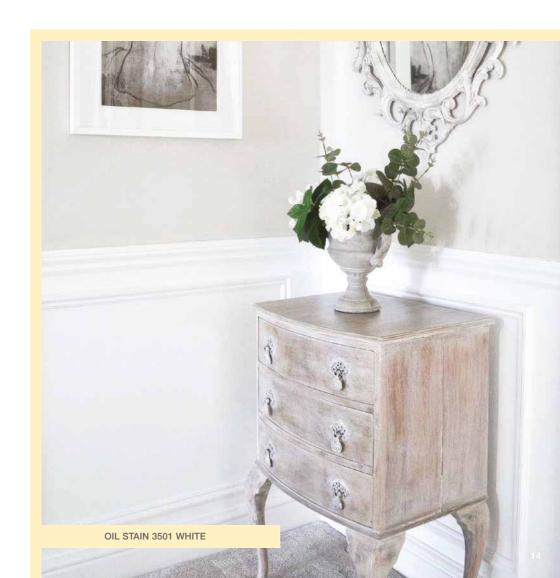

UV-PROTECTION OILS

Ideal for all vertically structured wood surfaces such as cladding, fencing, garden buildings, solid doors and more. Not recommended for horizontally structured surfaces such as decking, tables, benches, etc.



SUPPORTING A HEALTHY LIVING ENVIRONMENT

UV-PROTECTION OIL 410

Use 410 base on its own without a colour tint to provide a clear finish which supports a healthy living environment without the use of biocides to ensure the dry finish is safe for humans, plants and animals.



EXTRA PROTECTION

UV-PROTECTION OIL EXTRA 420

Use 420 base on its own without a colour tint to provide a clear finish which contains biocides to additionally protect against algae, mildew and fungal attack.

CHOOSE YOUR COLOUR

The standard colours are transparent to allow the wood's natural grain to remain visible, while becoming highly UV-resistant – the darker the colour, the stronger the UV-resistance.

















424 SPRUCE

425 OAK

426 LARCH

427 DOUGLAS FIR

428 RED CEDAR

429 NATURAL

431 LIGHT RED LI CEDAR

432 LIGHT OAK

ADDITIONAL COLOURS

Alternatively, choose a colour from the Polyx®-Oil standard colour range as seen below, such as 3067 Light Grey and 3075 Black.





LIGHT GREY

3067



3071



3072 AMBER



TERRA

3073



3074 GRAPHITE



3075 BLACK

3 CHOOSE YOUR FINISH



SATIN







DECKING-OIL

Ideal for exterior wood decking and garden furniture. Especially suitable for hardwoods, although a weathering period is recommended depending on the wood species.



2 CHOOSE YOUR COLOUR

The standard colours allow you to slightly tint your wood with a transparent colour finish which allows the wood grain to be visible. A clear finish is not available for this product.





Decking-Oil colours were developed to appear in harmony with their respective wood species, e.g. 010 Thermowood for Thermowood decking boards. The wood's natural colour and character will influence the final result. Please always trial apply.

ADDITIONAL COLOURS


Alternatively, choose a colour from any of the standard colour ranges within this brochure, such as Polyx®-Oil 3071 Honey, Wood Wax Finish 3143 Cognac, UV-Protection Oil 425 Oak, and Natural Oil Woodstain 732 Light Oak.





SATIN



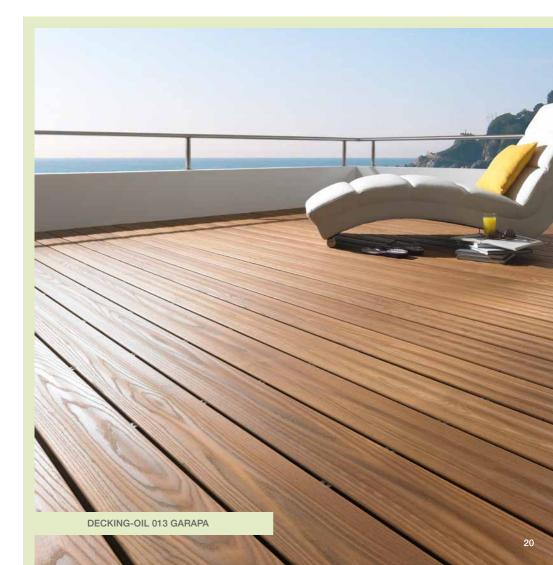

NATURAL OIL WOODSTAIN

Ideal for all exterior wood surfaces such as cladding, fencing, garden buildings and more. For softwoods, it is recommended to apply Osmo WR Base Coat 4001 prior to application.



CHOOSE YOUR COLOUR

The standard colours are transparent to allow the wood's natural grain to remain visible, while becoming highly UV-resistant – the darker the colour, the stronger the UV-resistance.



ADDITIONAL COLOURS

Alternatively, choose a colour from any of the standard colour ranges within this brochure, such as Polyx®-Oil 3071 Honey, Wood Wax Finish 3143 Cognac, UV-Protection Oil 425 Oak, and Decking-Oil 009 Larch.



307



21.42









3071 HONEY

3073 TERRA

3119 SILK GREY

3143 COGNAC

425 OAK

25 427 AK DOUGLAS FIR

009

013 GARAPA



ELEMENTS® COLOURS

Natural Oil Woodstain can be mixed to any of the 120 opaque colours from the Elements® colour range, which are inspired by the four elements of nature; air, earth, fire, and water. More information and colours on page 21.

RAL, BS & NCS COLOURS

More than 2000 additional opaque colours are available to choose from. RAL Classic and BS 4800 colours are available immediately. NCS, RAL Design, and many more are available upon request. Please note pearl, luminous, and metallic colours are not possible.



3 CHOOSE YOUR FINISH





SATIN

MATT







COUNTRY SHADES

The most durable for all weather conditions offering the strongest UV-resistance. Ideal for many exterior wood surfaces such as garden buildings, children's toys and play equipment, fencing, cladding, animal housing, flower beds and much more.



CHOOSE YOUR COLOUR



ELEMENTS® COLOURS

Country Shades can be mixed to any of the 120 opaque colours from the Elements® colour range, which are inspired by the four elements of nature; air, earth, fire, and water.





Scan to view all colours on the Osmo UK website. Then, order a printed Elements® Colour Card for a true colour match representation before mixing.

Also, pick up an Elements® Colour Card in your nearest Osmo Tinting System store.

ADDITIONAL COLOURS

Alternatively, choose an opaque colour from the Wood Wax Finish standard intensive colour range as seen below, such as 3131 Green, 3169 Black and 3186 White.



RAL, BS & NCS COLOURS

More than 2000 additional opaque colours are available to choose from. RAL Classic and BS 4800 colours are available immediately. NCS, RAL Design, and many more are available upon request. Please note pearl, luminous, and metallic colours are not possible.



3 CHOOSE YOUR FINISH



SATIN





OSMO UK Unit 24, Anglo Business Park Smeaton Close, Aylesbury, Bucks **HP19 8UP**

01296 481220 | sales@osmouk.com www.osmouk.com













OSMO RECOMMENDS

