



FLOORING

SOLID WOOD
FLOORING

CREATIV-FLOORING



CONTENTS



WOOD MEETS COLOUR
This is Osmo

YOUR CHOICE 8–9



SOLID WOOD FLOORING

Light diversity 12–21
Fascinating red 22–27
Dark elegance 28–33
Renovation Plank 34–37



CREATIV-FLOORING 38–43

CARE AND CLEANING 44–47

DETAILS 50–67

YOUR CHOICE
Sorting and quality 52–53

SOLID WOOD FLOORING

Light diversity 54–58
Fascinating red 59
Dark elegance 59
Renovation Plank 60–61

CREATIV-FLOORING 62–63

INSTALLATION TIPS AND ACCESSORIES 64–65
INSTALLATION ASSORTMENT OVERVIEW 66–67

Osmo is a member of the European Federation of the Parquet Industry, FEP. The use of the “REAL WOOD” logo is only allowed for companies which use real wood in production.



www.realwood.eu

osmo®

THIS IS OSMO



WOOD MEETS COLOUR

WOOD, DURABLE AND STABLE. A tree grows into a solid quality over 100 years. Osmo has gathered experience working with wood during its 100 years as a company. Our attention and expertise goes into the correct processing and long-term protection of wood as a valuable construction material.

COLOUR THAT PROTECTS. Only a finish that fits the needs of wood can retain the natural beauty and durability of this material in the long term. As early as 40 years ago, Osmo, as a pioneer in this field, developed its microporous, natural oil and wax-based wood finishes.

THE CONNECTION. Our passion for wood and wood finishes at Osmo flows into constant product research and development. Up to now Osmo is still the only company which completes its value-adding chain with internally developed and produced wood finishes.

Wood and colour from one company – a combination which you can rely on.



THIS IS OSMO



OUR FUTURE

WOOD PROTECTS OUR CLIMATE

Since 1850, the CO₂- concentration in the atmosphere has increased by approximately 25% and the average temperature has risen by 0.7 degrees Celsius. The results are more than dramatic: droughts, tsunamis, flooding and hurricanes. During the Rio environmental conference, the international community agreed to reduce greenhouse gases. Nevertheless, no exact guidelines or measures have ever been put into place. Can we not do more to save our environment? Or do we already have a solution? One part of the larger solution could be forestry:

As early as 1713, Hans-Carl von Carlowitz was already using the term sustainability in connection with the forestry industry. Sustainability means the conscious use and handling of available forestry resources – not harvesting more trees than are being planted. Long-term planning for multiple generations is a must for success. It takes decades or even centuries until a tree has grown and becomes fully suitable for use as wood. Osmo has been supporting this way of thinking for many years and proudly offers certain products which are FSC® certified.

Wood is a renewable raw material which, if we work with this great natural product correctly, will still be available for centuries. And even long after the oil reserves have been exhausted.

Whilst growing a tree absorbs and permanently stores carbon dioxide out of the surrounding atmosphere. One m³ of wood can store up to one tonne of the harmful CO₂ and first releases it again after the tree has died. In a normal forest, trees begin to give off the CO₂ after they die and begin to rot, whereas in a commercially used forest (where trees are harvested for processing) the tree can store CO₂ significantly longer. The manufacturing process of products, such as decking boards or screens etc., means that the CO₂ remains stored within the wood – it is withdrawn from the environment. Managed, renewable forests can positively affect the CO₂ balance.

Wood absorbs and stores CO₂ very effectively and, due to its vast range of uses, it is an excellent alternative to other materials and products which damage the environment during processing. As long as we keep the words and thoughts of Hans-Carl von Carlowitz in mind, and take them to heart, more CO₂ will be absorbed from the atmosphere by forestry than is released for many centuries to come.

It's up to us: wood creates quality of life – for you and the environment. So join us ...

YOUR CHOICE



YOUR CHOICE

Solid wood flooring is the best thing to have underfoot. It is warm, easy to clean and hard-wearing, provides a healthy atmosphere and has unrivalled beauty.



SOLID WOOD FLOORING

For a lifetime. Wooden flooring creates a special atmosphere. Wood in its purest and most beautiful form: through and through solid in one piece. It is an investment for life which can be enjoyed every day. Elegant wooden flooring gives a room a whole new character – more so than any piece of furniture.

RENOVATION PLANK

Low structural height. Do you have underfloor heating or are you not allowed to shorten doors in your apartment? For those who have felt they have had to go without wooden flooring, we now have the perfect solution. Renovation Planks in Oak, Ash, Pine or Larch have a low structural height. They combine the charm of solid wood flooring with the needs of modern dwellings or classic renovation.

pages 9 – 37



CREATIV-FLOORING

Different to others. Colour or surface? Colour and surface? Emphasize your personal style with Osmo Creativ-Flooring. Upon request our flooring can be delivered with various surface structures and in many colour tones. Do you like the look of structured flooring? Or do you prefer a colourful solid Oak floor? Let your imagination run wild with Osmo.

pages 38 – 43



SOLID WOOD FLOORING




Wood just like we love
it. The great feeling
of it under our feet.
Wood designed for
life.

SOLID WOOD
FLOORING



SOLID WOOD FLOORING

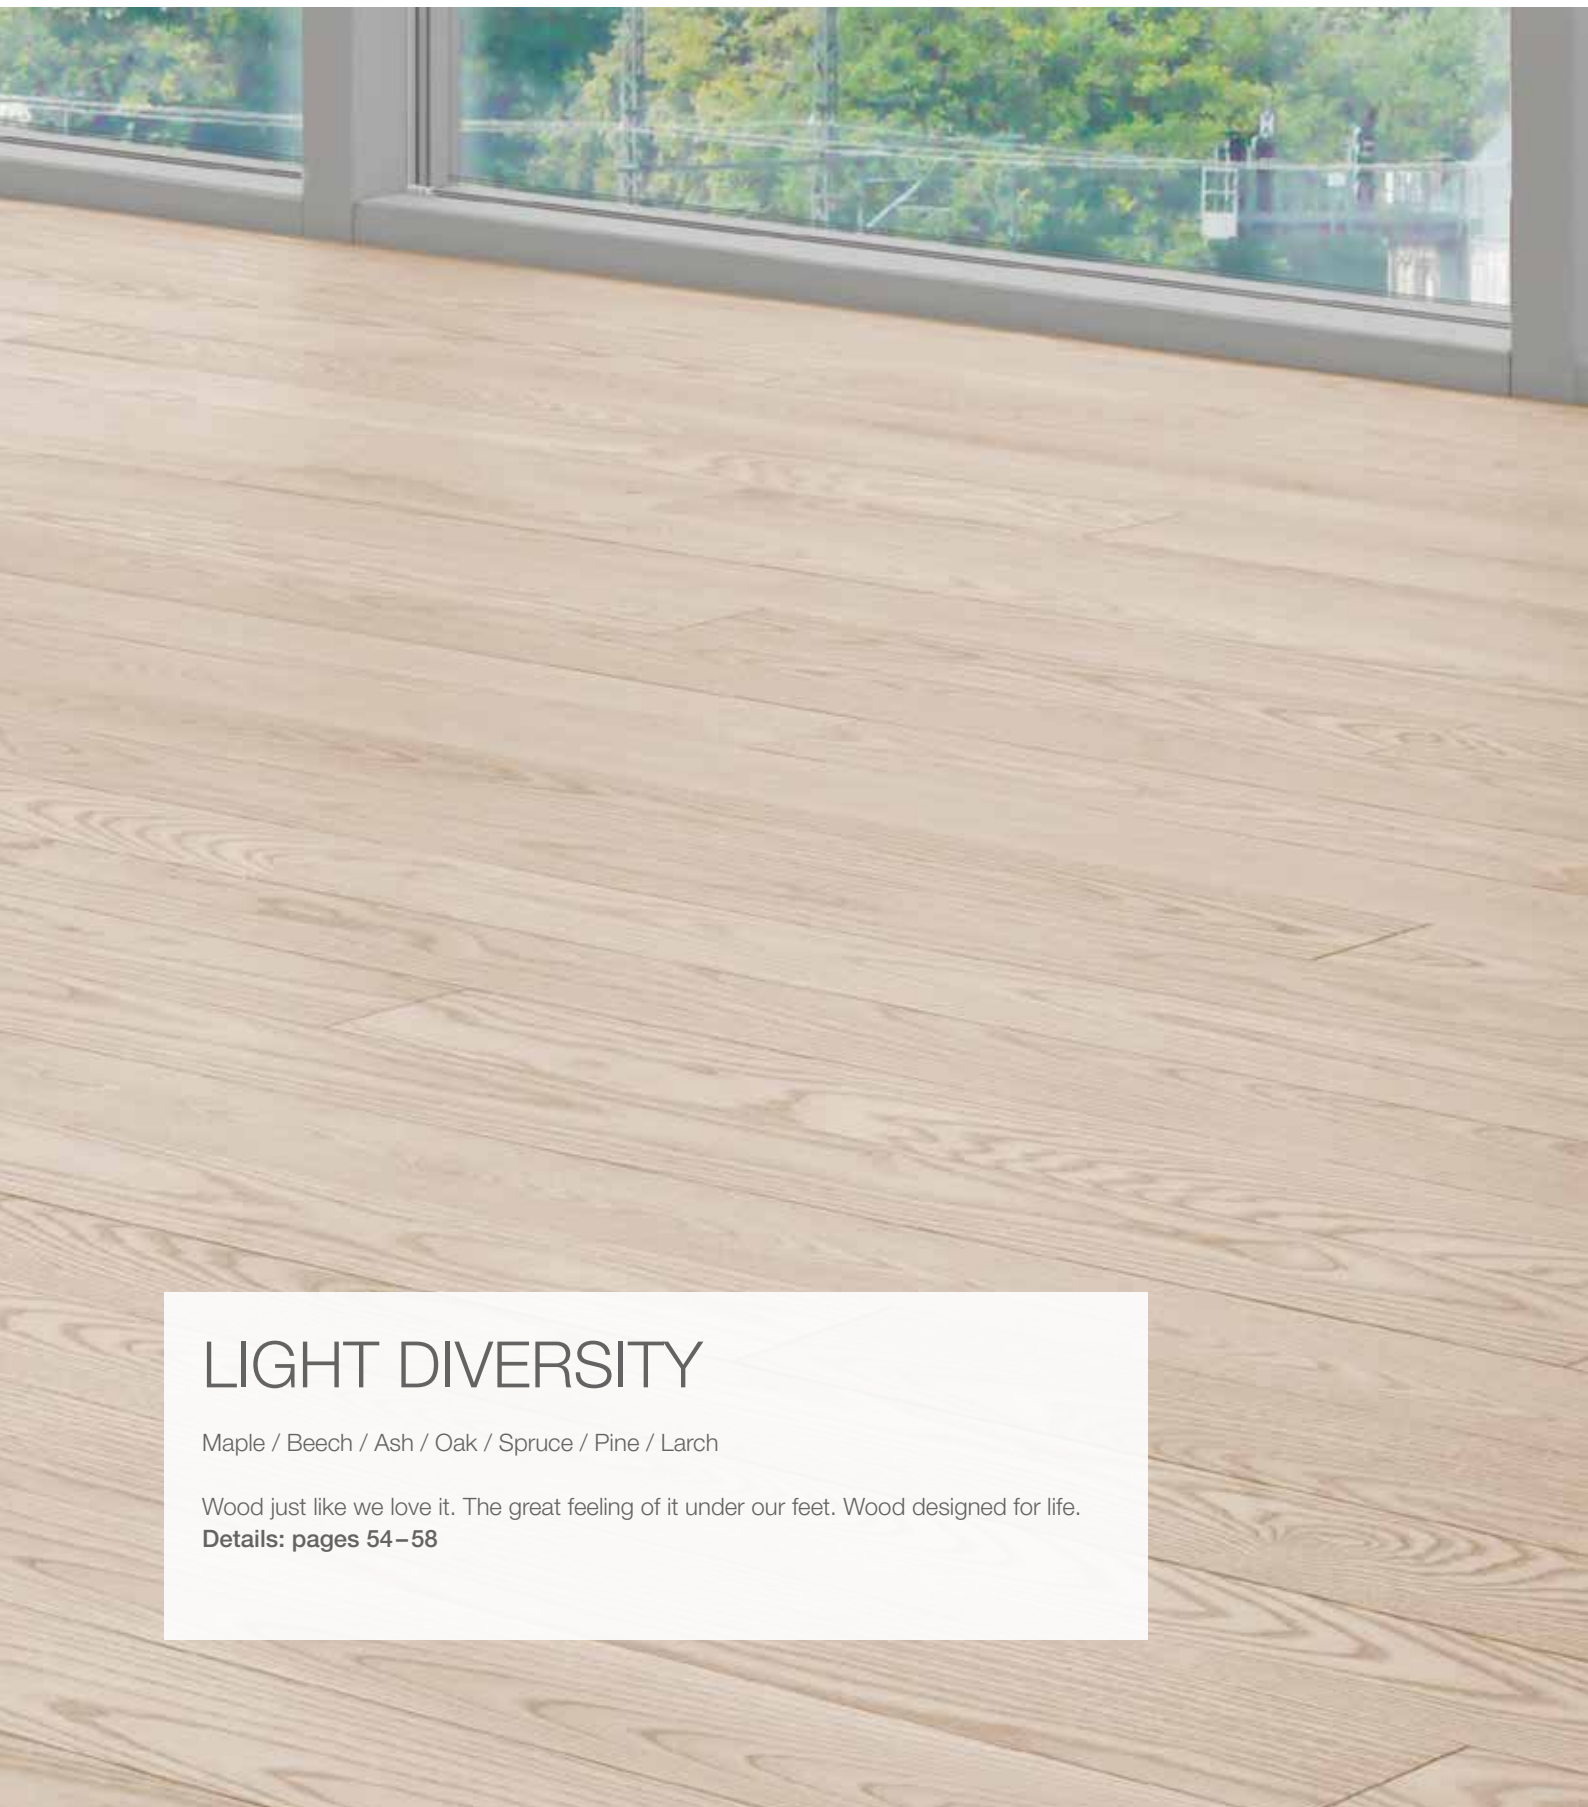

LIGHT DIVERSITY

Maple / Beech / Ash / Oak / Spruce / Pine / Larch

Wood just like we love it. The great feeling of it under our feet. Wood designed for life.

Details: pages 54–58



Solid wood flooring American Ash, select, factory finished clear



CANADIAN MAPLE

is a particularly light-coloured hard wood with a unique charm.

Origin: Canada



Solid wood flooring Beech, lightly steamed, select, factory finished clear

BEECH

is a particularly light-coloured hard wood with a unique charm.

Origin: Germany



Solid wood flooring Beech, lightly steamed, life, factory finished clear



Solid wood flooring European Oak, rustic, **factory finished natural** **NEW**

OAK

is the classic among wood species – timeless, traditional and always in fashion.

Origin: Europe, North America




Solid wood flooring European Oak, rustic, factory finished clear

OAK ROOM LENGTHS

For that special flair at home - our 4-metre floorboards. More details on page 55.

Origin: Europe

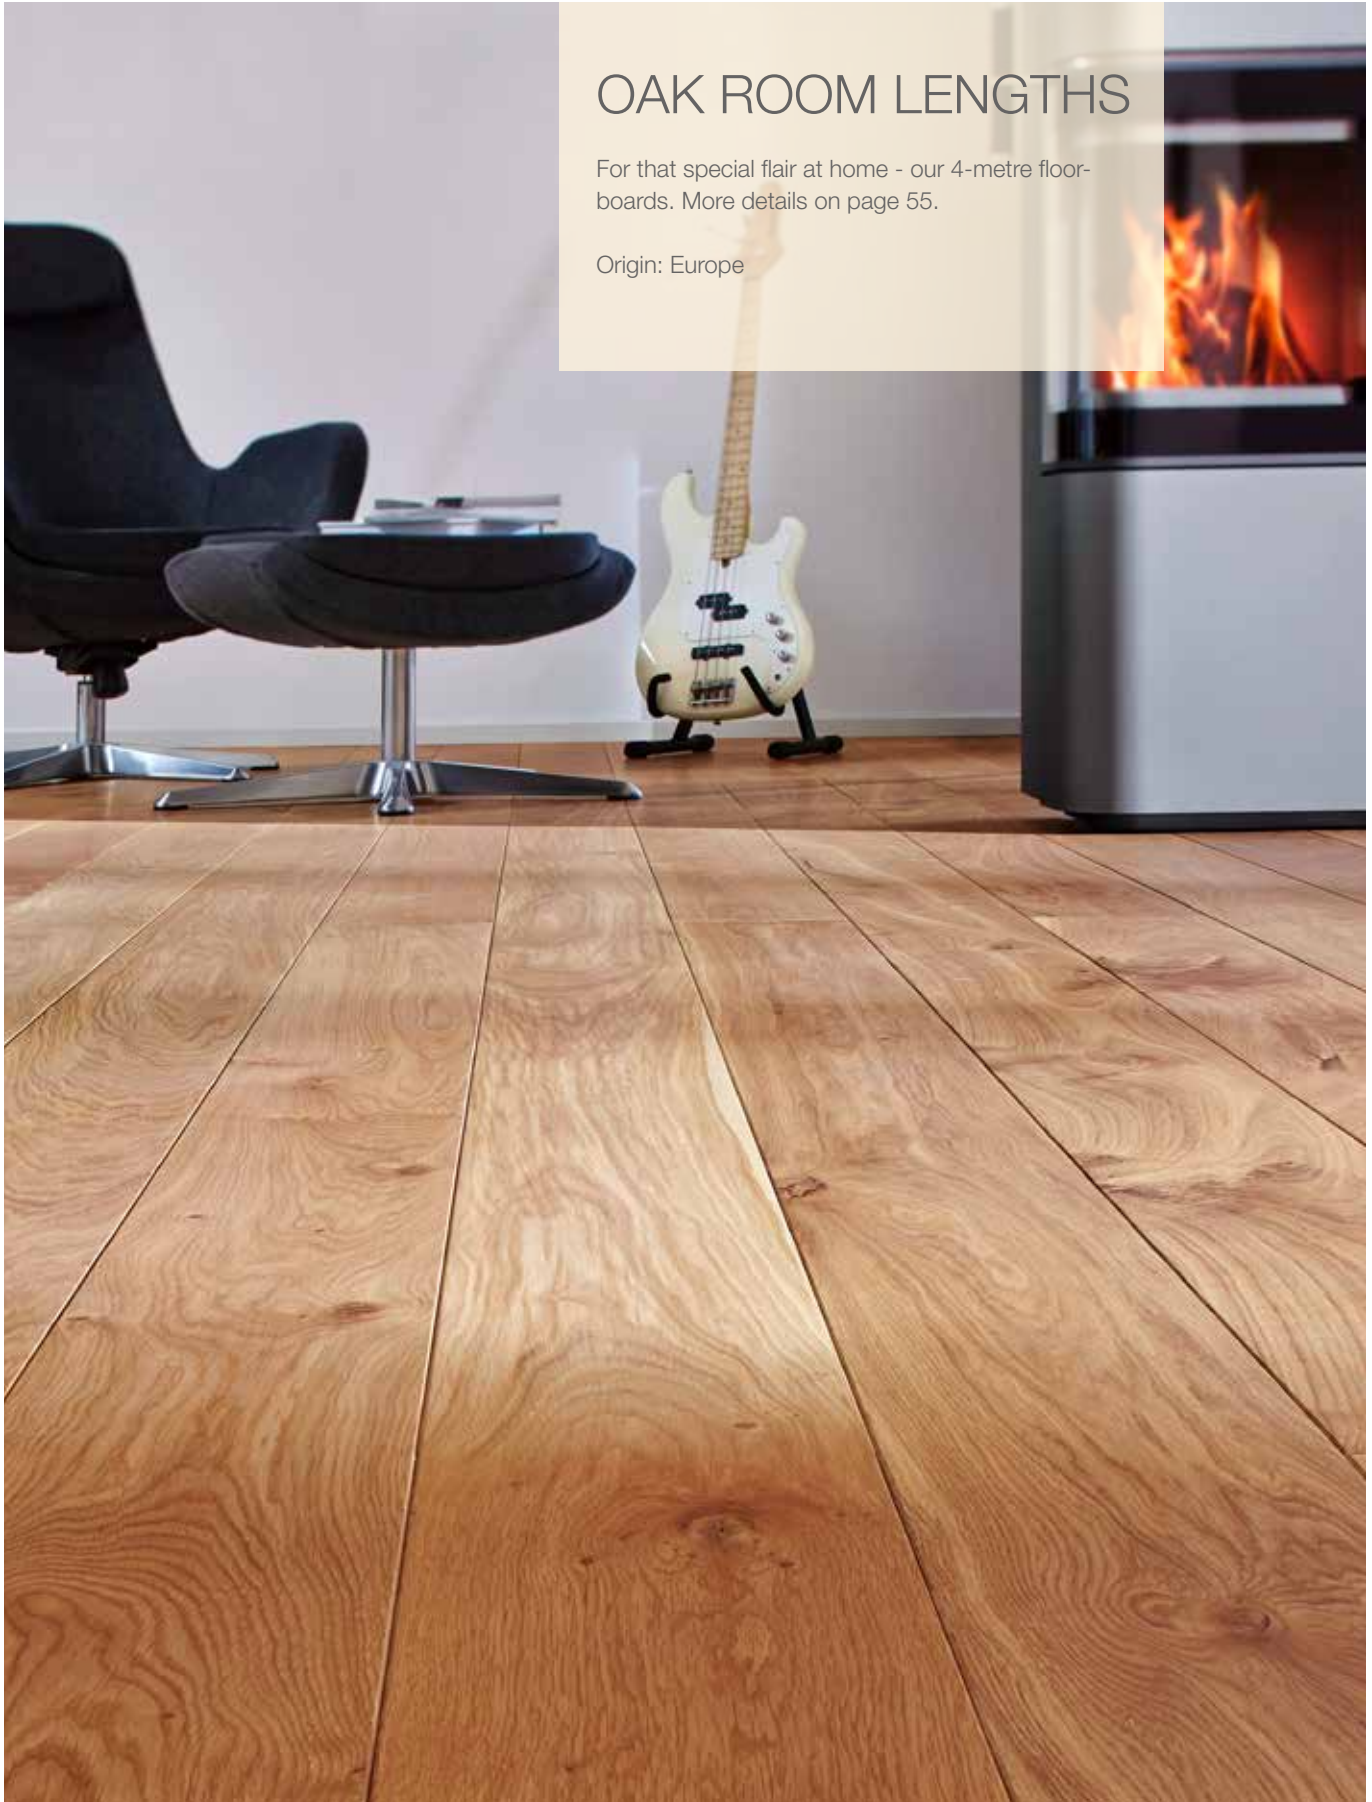

Solid wood flooring European Oak, mixed (natural/marked/rustic), sanded, finished clear during installation



AMERICAN ASH

is a subtle, light-coloured wood with a clear, distinct wood grain.

Origin: North America

Solid wood flooring American Ash, select, factory finished clear



SIBERIAN LARCH

liven up any room with an impressive structure and a warm, knotty appearance.

Origin: Siberia

Solid wood flooring Siberian Larch, grade A, factory finished clear




SPRUCE

is the most important European wood species. This light-coloured knotty wood is used extensively in interior design and is always in fashion.

Origin: Scandinavia

Solid wood flooring nordic Spruce, grade A, factory finished clear

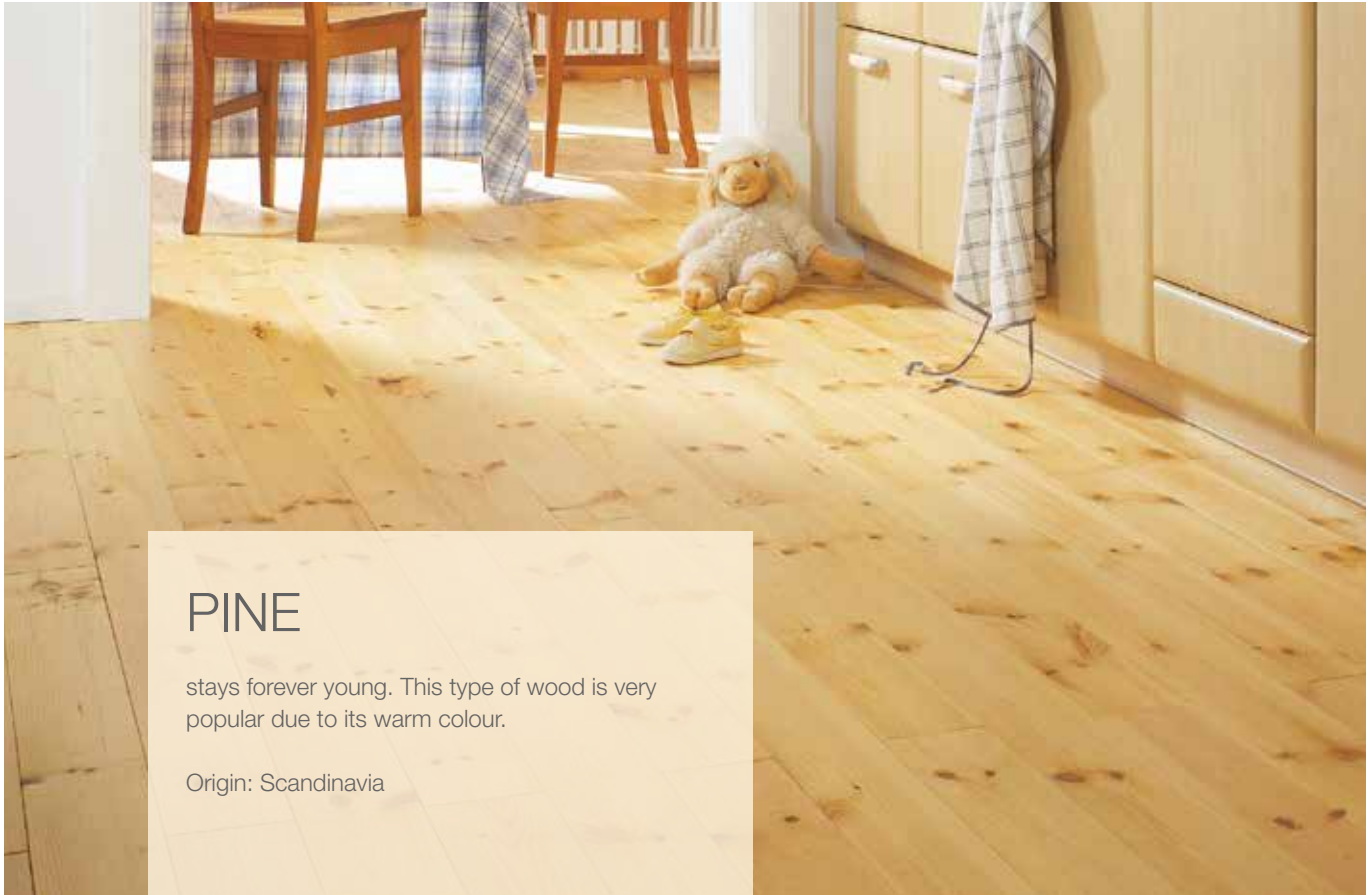


PINE

stays forever young. This type of wood is very popular due to its warm colour.

Origin: Scandinavia

Solid wood flooring nordic Pine, grade A, factory finished clear

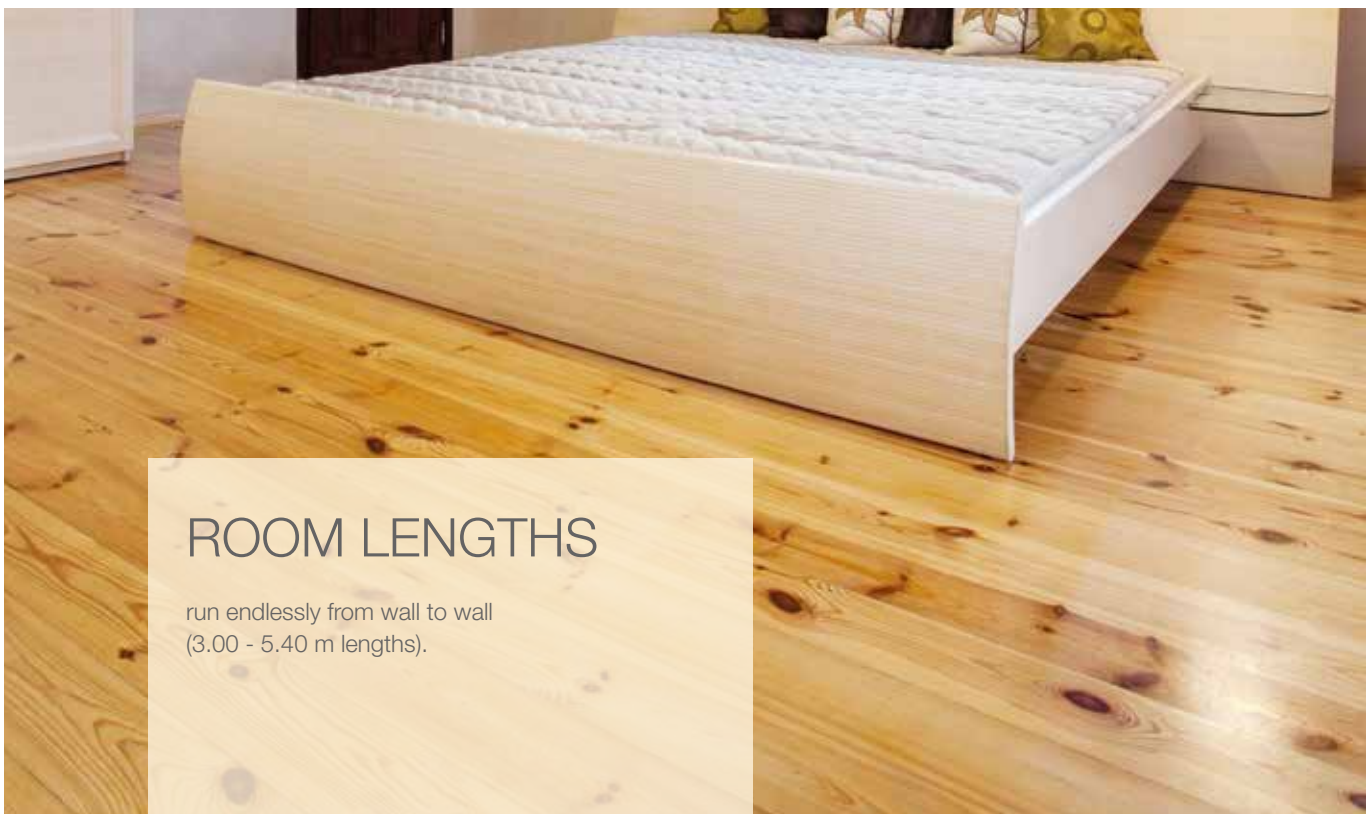


ROOM LENGTHS

run endlessly from wall to wall
(3.00 - 5.40 m lengths).

Solid wood flooring room length, nordic Pine, grade A, finished clear during installation



SOLID WOOD FLOORING

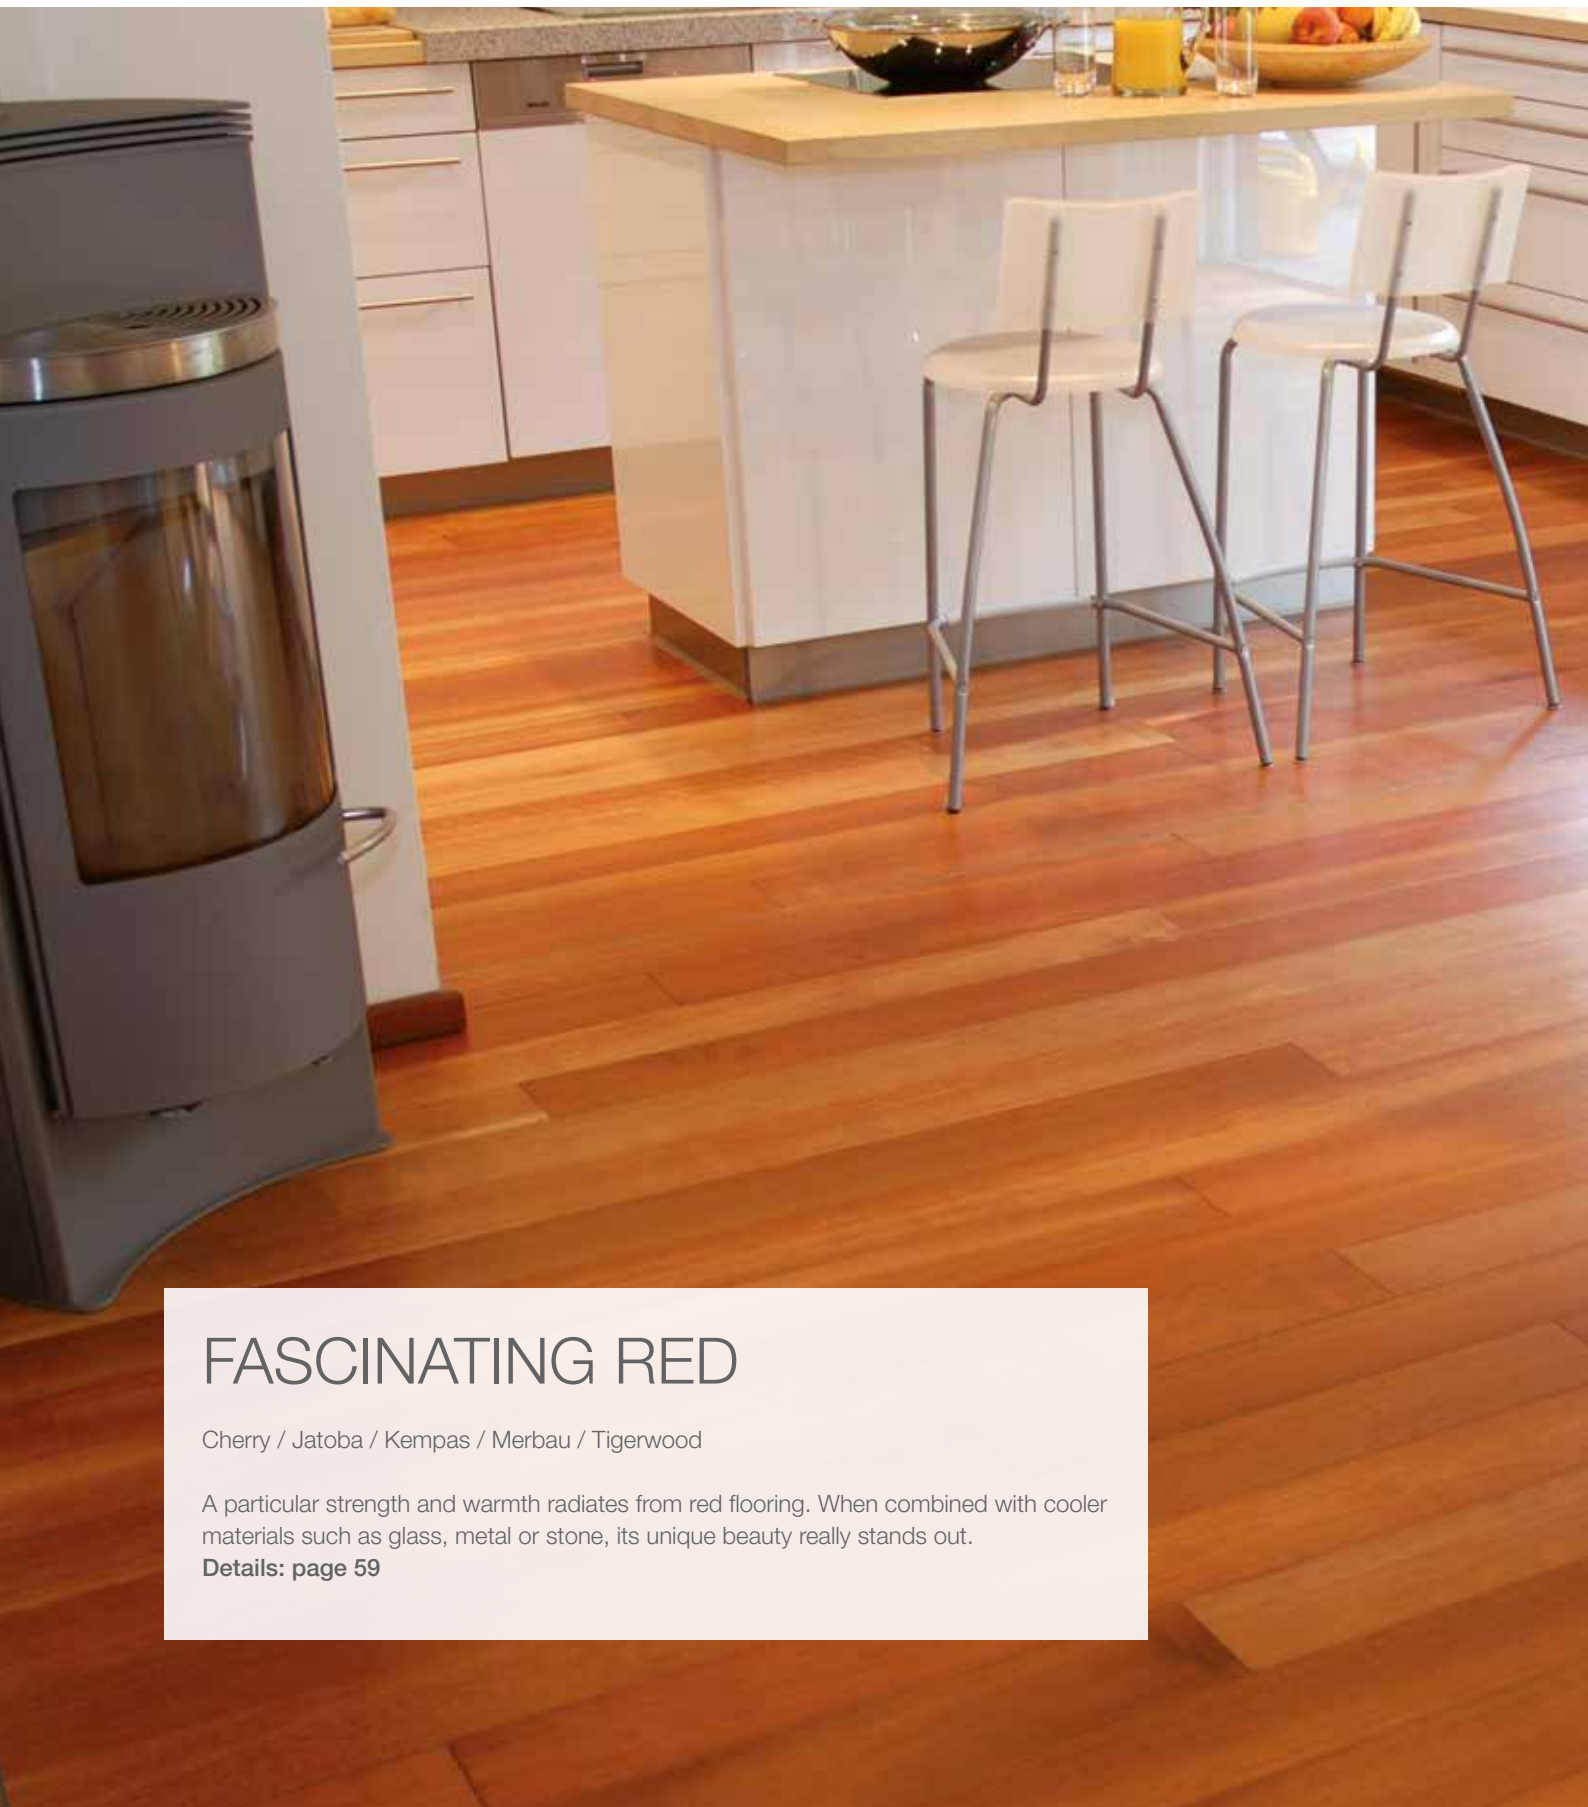

FASCINATING RED

Cherry / Jatoba / Kempas / Merbau / Tigerwood

A particular strength and warmth radiates from red flooring. When combined with cooler materials such as glass, metal or stone, its unique beauty really stands out.

Details: page 59



Solid wood flooring Kempas, select, factory finished clear




FASCINATING RED // KEMPAS / MERBAU

KEMPAS

has a calming wood grain and colour. Its light red colour darkens to a beautiful orange-brown.

Origin: South-East Asia

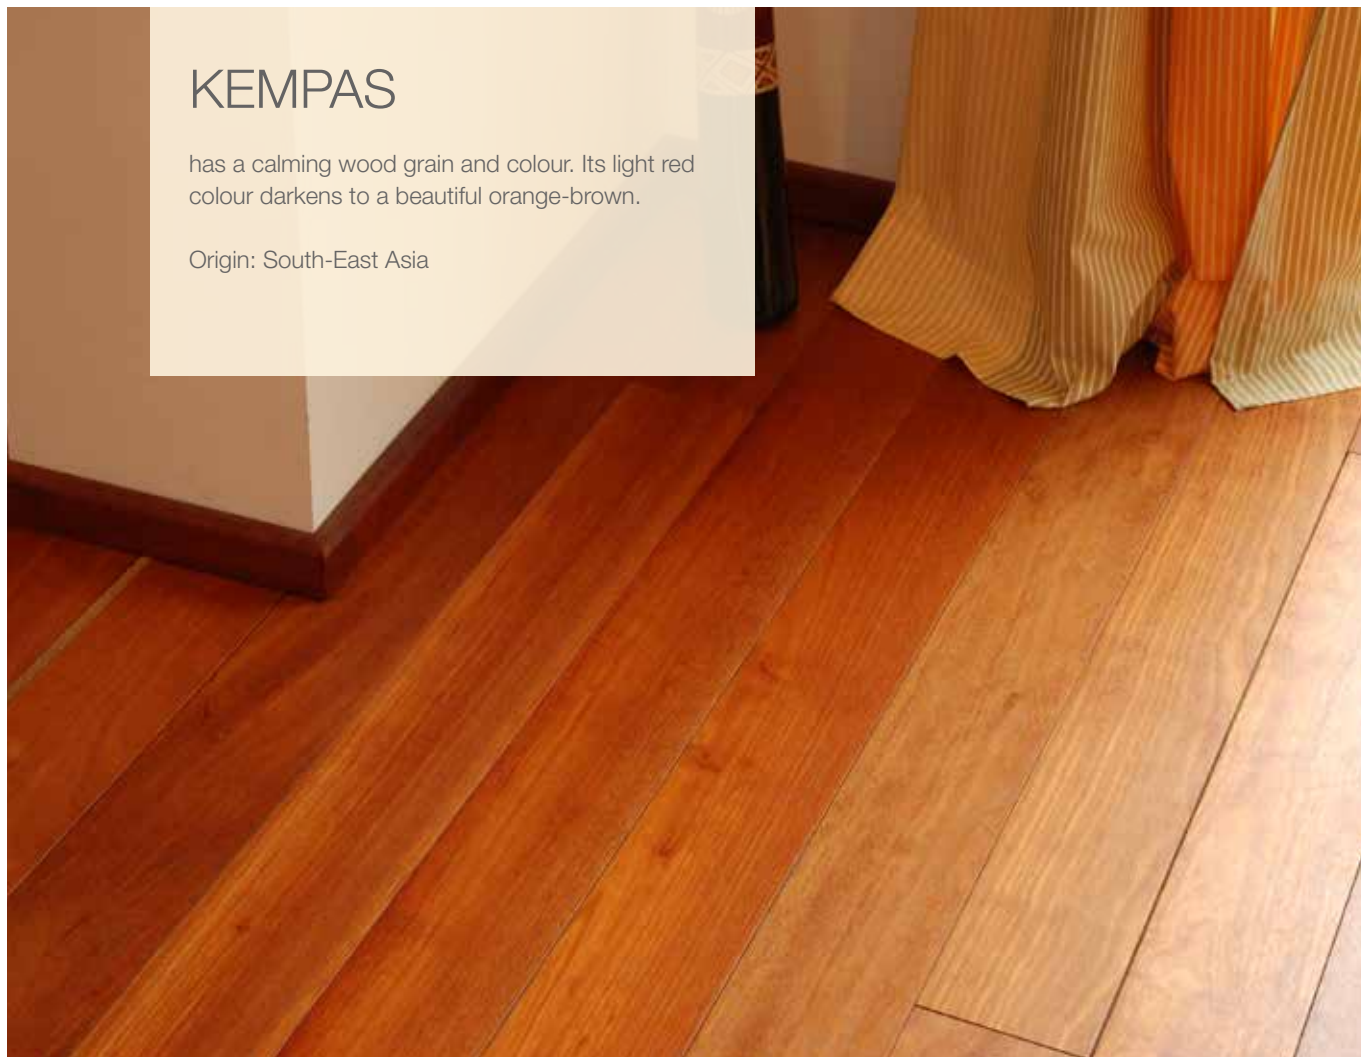


Solid wood flooring Kempas, select, factory finished clear

MERBAU

is a primarily dark wood in an attractive red to red-dish brown colour.

Origin: South-East Asia

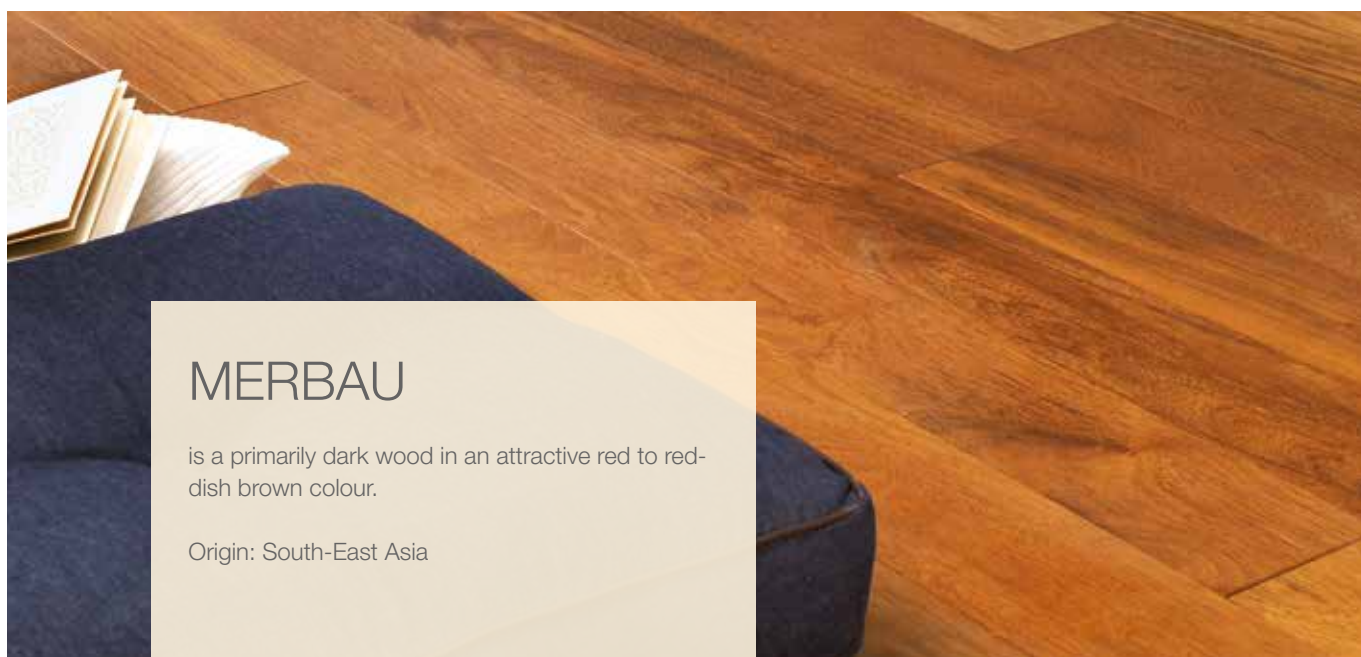


Solid wood flooring Merbau, select, factory finished clear

AMERICAN CHERRY

offers a very elegant look in a beautiful reddish brown colour.

Origin: North America

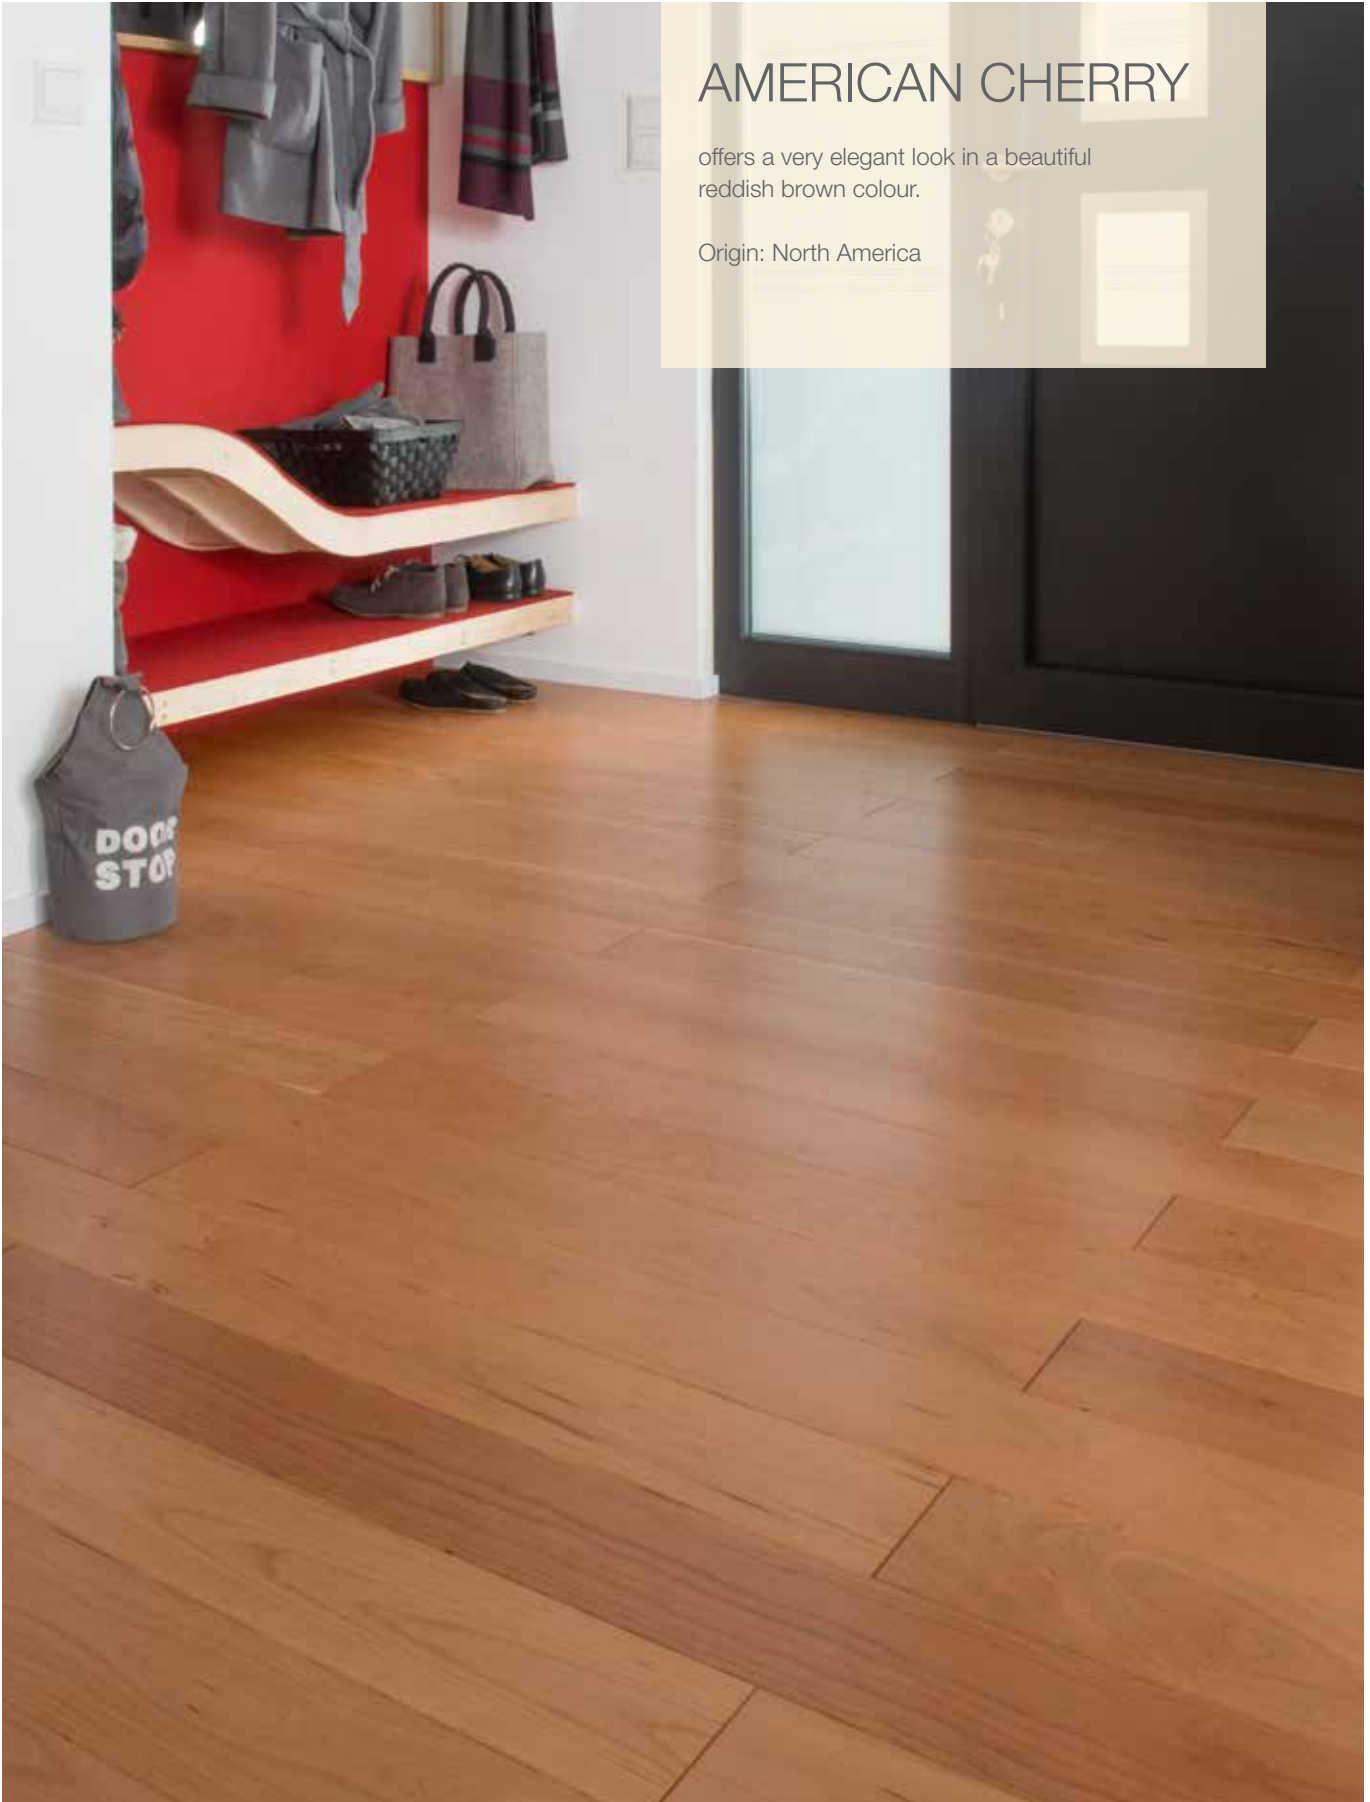

Solid wood flooring American Cherry, select, factory finished clear



JATOBA

is a very hard wood species. Vibrant colouring broken up by a fine wood grain is typical for this type of wood.

Origin: South America

Solid wood flooring Jatoba, select, factory finished clear



TIGERWOOD

is an extravagant wood species with a warm copper tone with a characteristic wood grain and highly contrasting streaks.

Origin: South America



DARK ELEGANCE

Smoked Oak / Wenge / Walnut / Thermo Ash

Low-key appearance and elegance characterize dark solid wood flooring. In combination with stronger contrasts, it looks especially magnificent. **Details: page 59**






SMOKED OAK

is characterize by an especially strong, elegant dark colour.

Origin: Western Europe

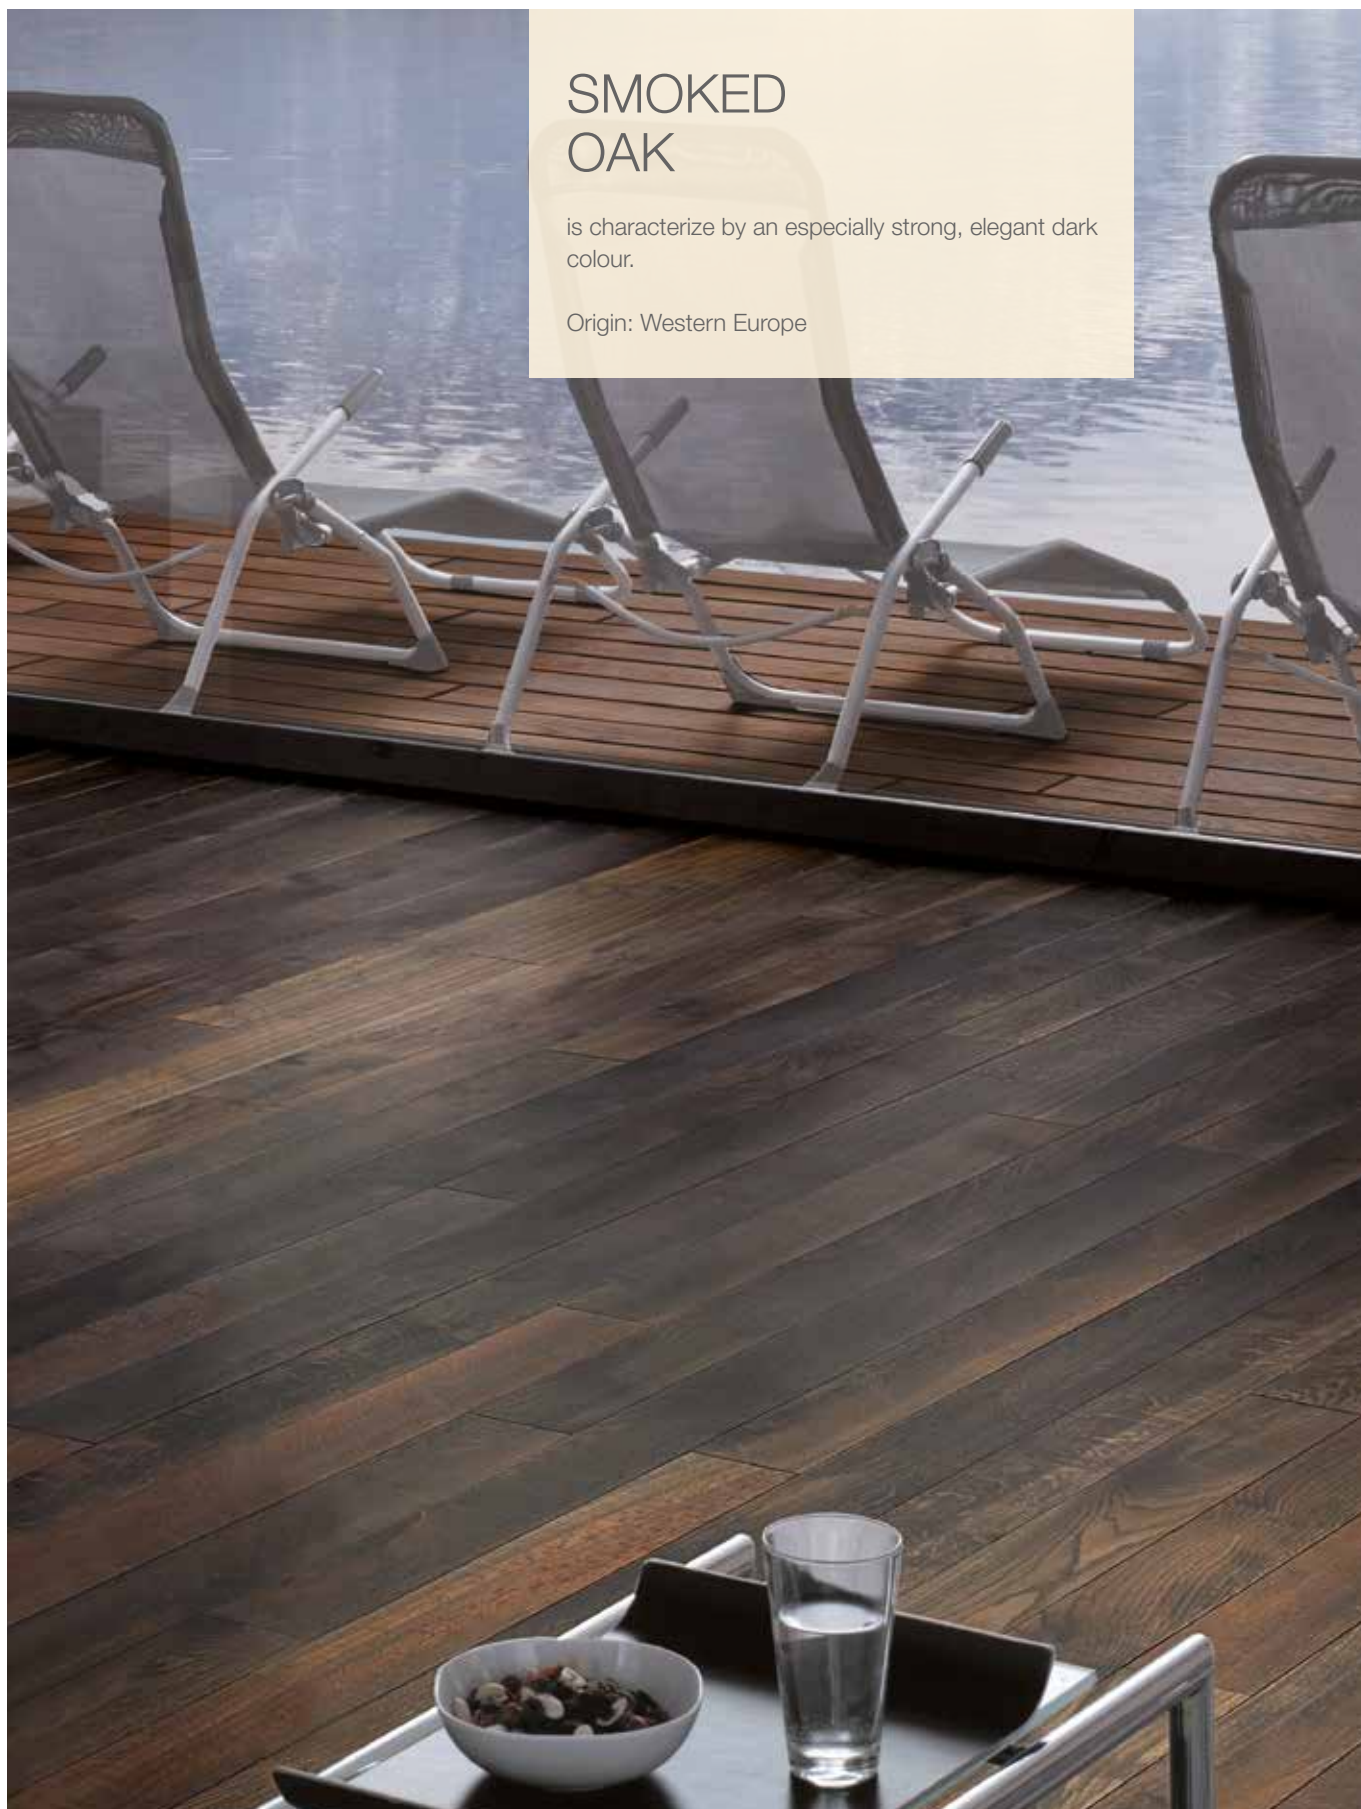


Solid wood flooring European Oak, Smoked, marked, factory finished clear

THERMO ASH

convinces through a beautiful dark brown colour. The wood is steam and heat treated to alter the cell structure so that it is permanently dimensionally stable.

Origin: Western Europe

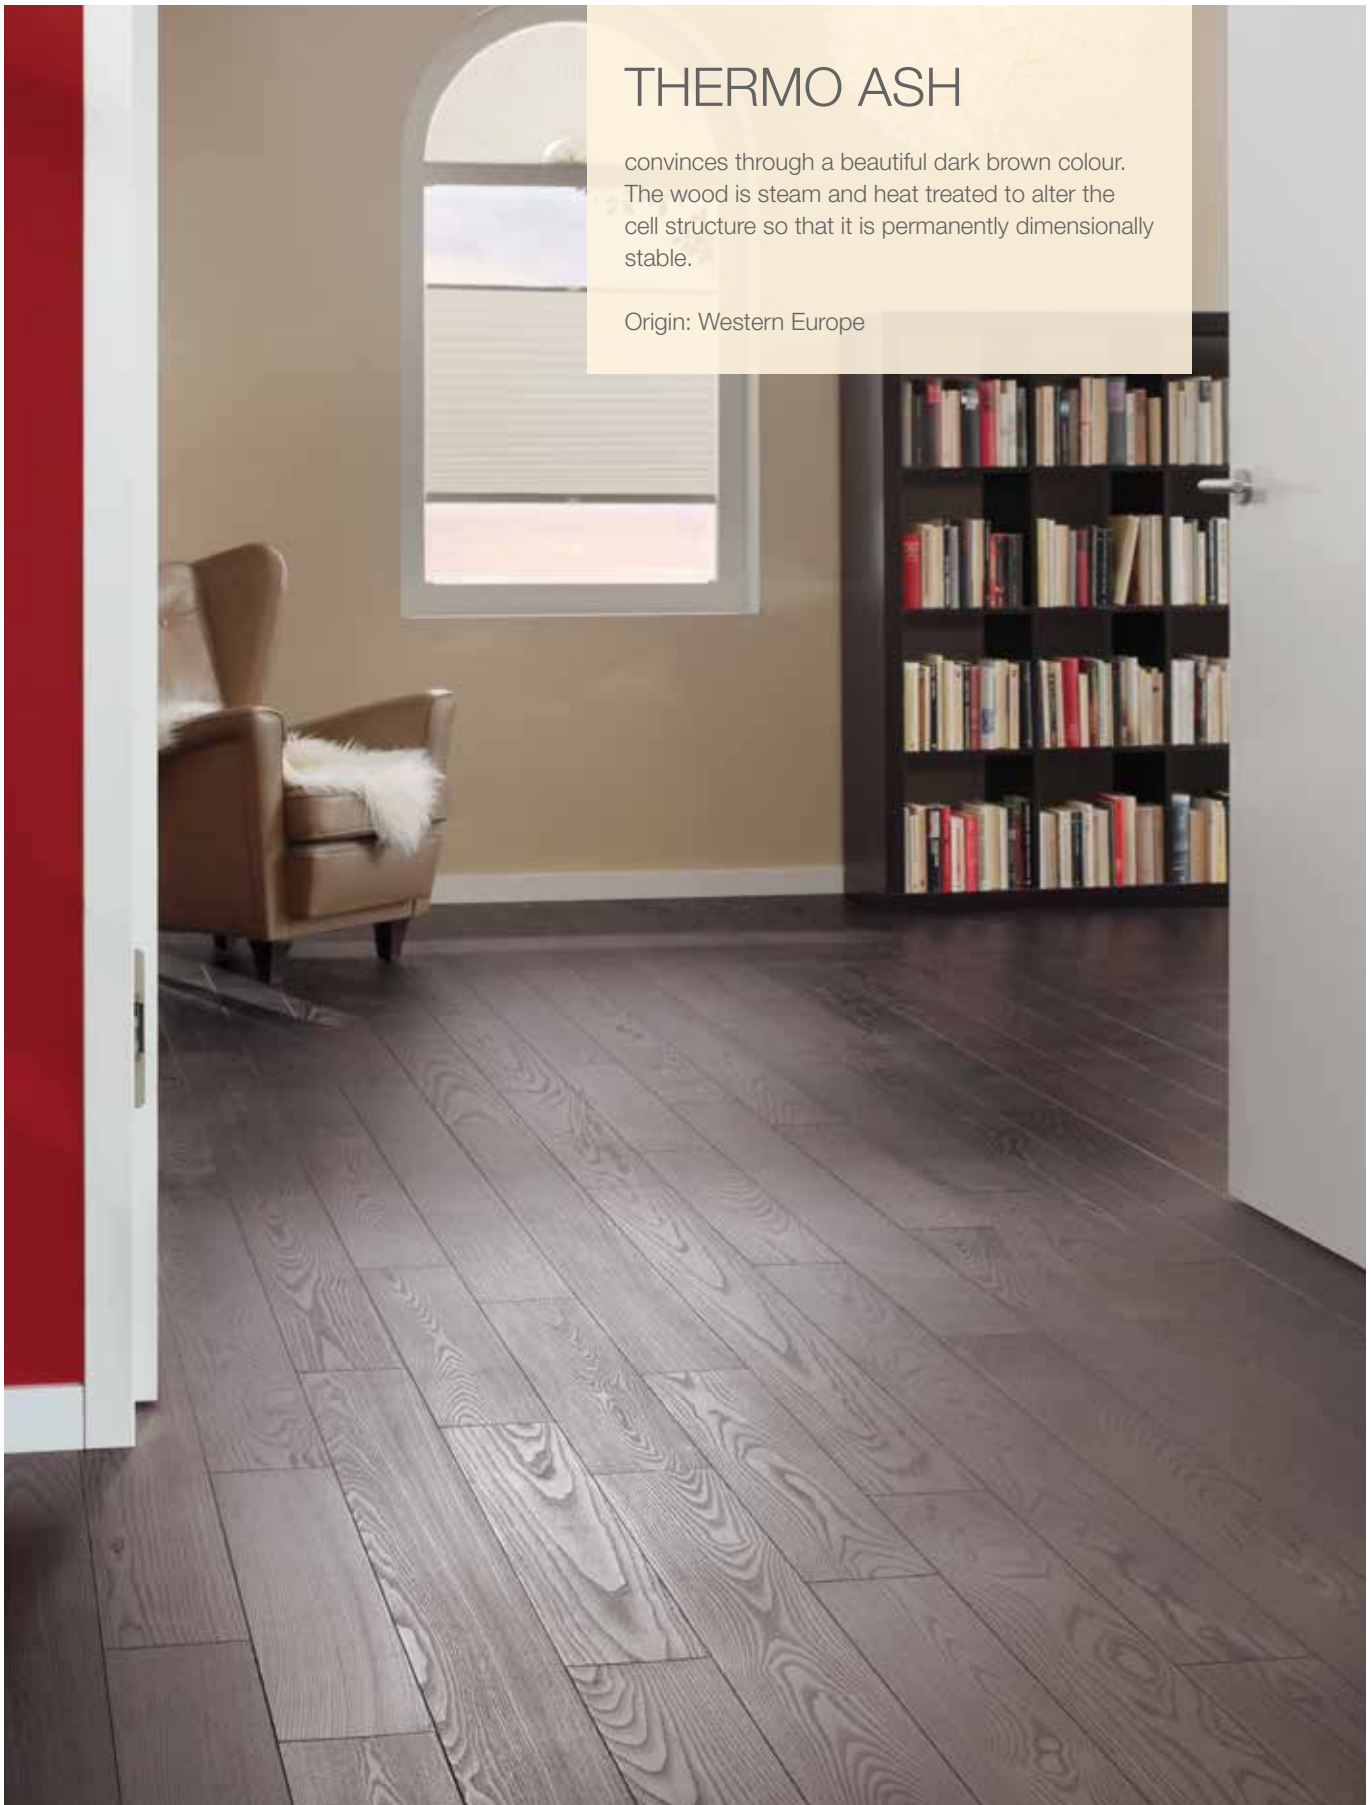

Solid wood flooring Thermo Ash, natural, factory finished in Cognac



WENGE

is a very decorative dark wood species that is however not always readily available.

Origin: Central Africa





AMERICAN WALNUT

is a valuable and elegant wood species, which features a very lively wood grain with a distinctive structure.

Origin: North America



SOLID WOOD FLOORING



RENOVATION PLANK

Oak / Smoked Oak / Ash / Pine / Larch

For those who until now have been forced to use parquet and laminate due to a lack of space, Osmo now has the perfect alternative: a solid wood floor with only 15 mm thickness. **Details: pages 60–61**





SOLID WOOD FLOORING




Renovation Plank Pine, grade A, factory finished in Stone

RENOVATION PLANK

Do you have underfloor heating? Or are you not allowed to shorten doors in a rented apartment? Now you do not have to do without wooden flooring as we have the perfect solution for you. Renovation Planks in Oak, Ash, Pine or Larch are characterized by a low structural height.

- > Low structural height of 15 mm
- > Large selection of grades
- > Available either untreated or factory finished
- > Suitable for hydronic underfloor heating (except for smoked Oak, Ash and Pine)

YOUR WOOD

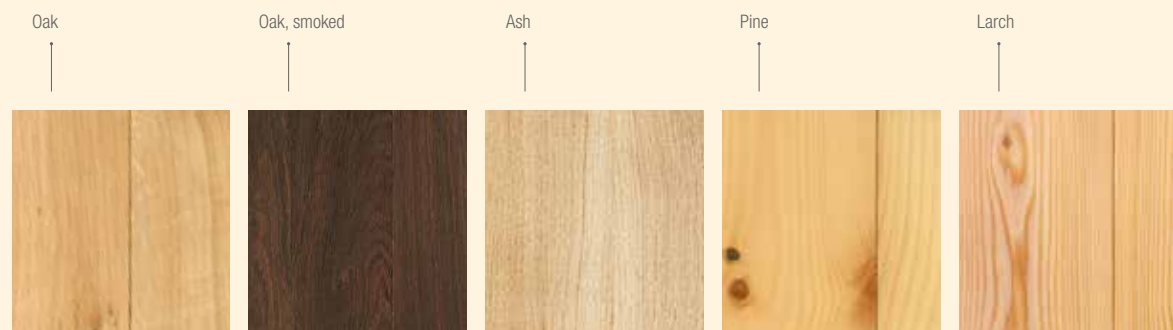


YOUR CHOICE

- > grade
- > untreated
- > factory finished


Detail
pages 60–61

YOUR COLOUR TONES FOR PINE

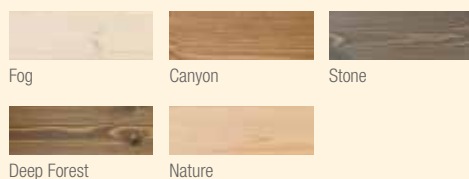


YOUR COLOUR TONES FOR OAK AND ASH





Different to others.
You love colours, and
like unusual surfaces.
Now you have the
choice: colour or
surface? Or both?

CREATIV-FLOORING




CREATIV-FLOORING


For all creative minds who want to celebrate their own particularly unique taste, Osmo offers Creativ-Flooring to satisfy your needs. Make your own personal designer flooring by choosing from various surface structures and colour tones - it doesn't get any more individual than this! Add a special accent to your house by bringing colour into flooring. How about a solid Oak floor in coral red or fern green? Or combine structures and colour tones, for example with a scraped floor in white. Celebrate your own unique style!

- > Finished and ready to install
- > Various surface structures: sanded, brushed, aged, sawn or scraped
- > Clear or coloured factory finish
- > Can be individually designed (Osmo Wood Wax Finish)
- > 4 gloss levels
- > Skirting board in the same colour
- > Specially designed cleaning and care products

YOUR WOOD

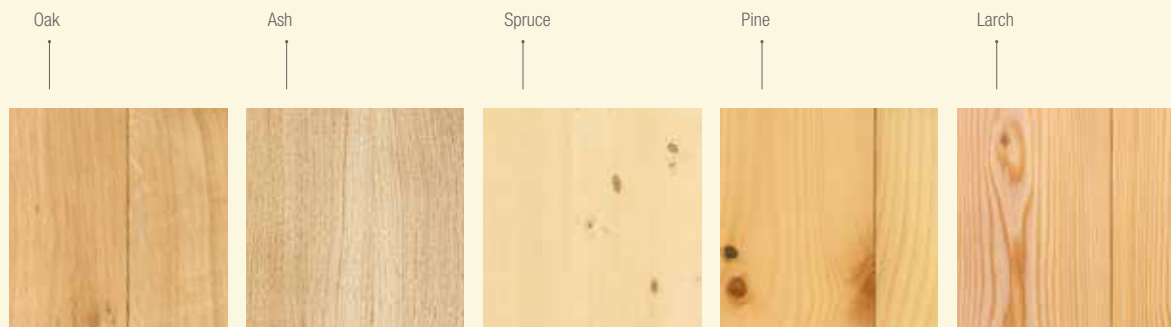

YOUR CHOICE

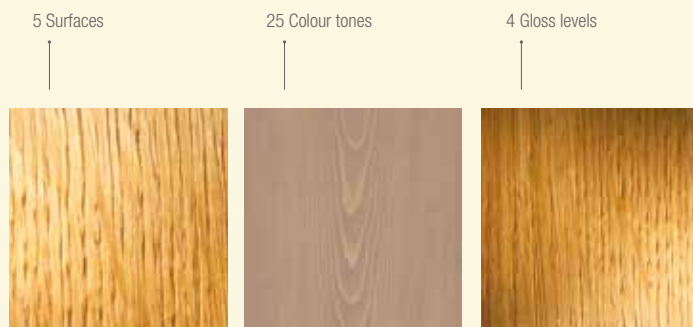

THE POSSIBILITIES

The design possibilities of Creativ-Flooring are unsurpassed. You can get your favourite wood species in different structured surfaces or even combine two structures. The flooring is then factory finished in the colour tone and gloss level of your choice. Just the way you like it.

Details
pages 62–63


DIFFERENT TO OTHERS.
NOW YOU CAN MAKE
YOUR OWN CHOICE.



SURFACE

Choose between 5 different surface structures or even combine two structures.

Solid wood flooring Larch, scraped

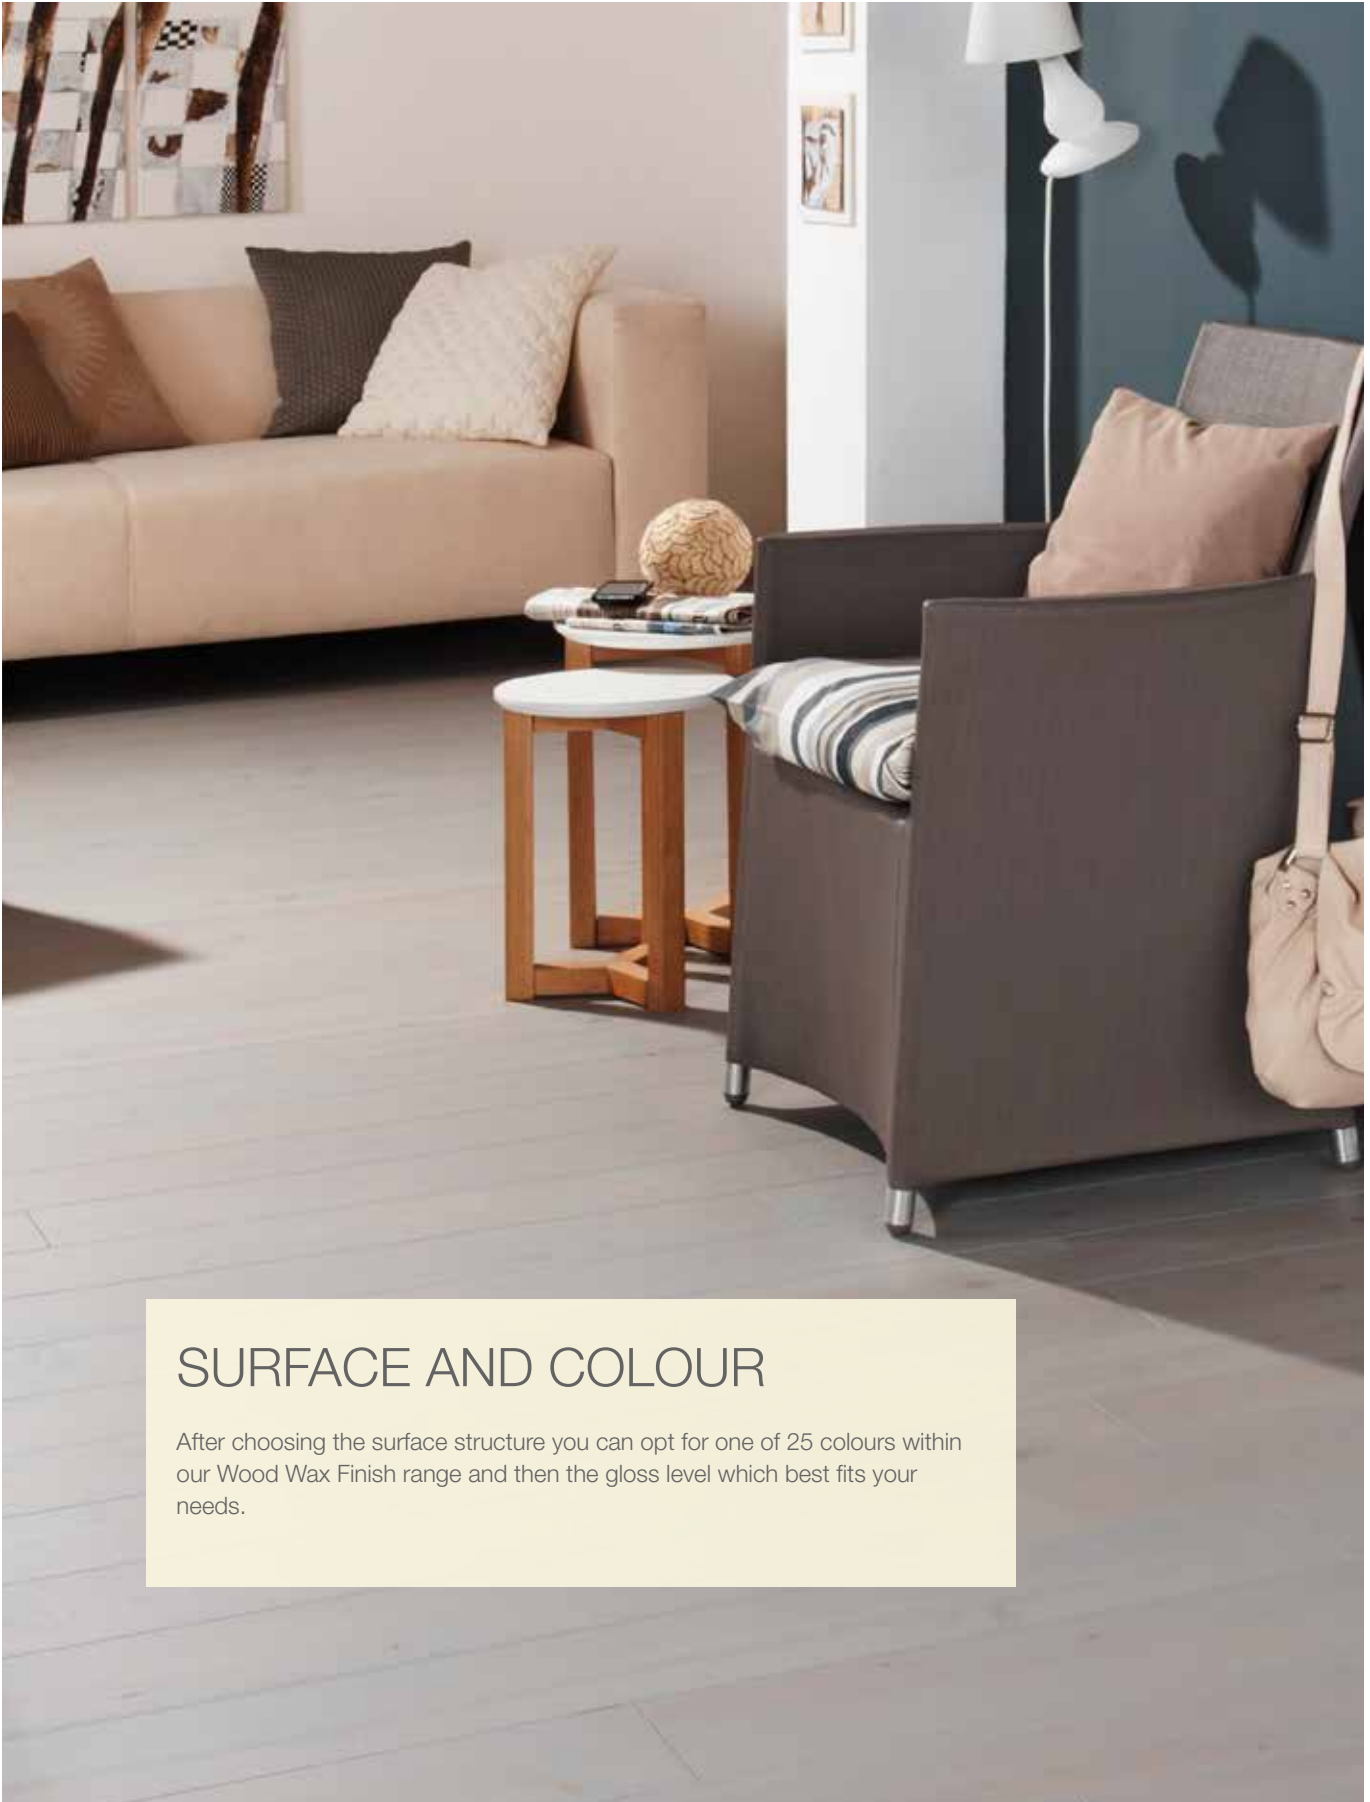

SURFACE AND COLOUR

After choosing the surface structure you can opt for one of 25 colours within our Wood Wax Finish range and then the gloss level which best fits your needs.



CARE AND CLEANING



Life is too short for
wrong maintenance.
Get comfortable.

CARE & CLEANING



CARE AND CLEANING



Information about cleaning and maintaining wooden flooring can be found in our current booklet "Your Wooden Floor".



CARE FOR FLOORING AT HOME

Wooden flooring feels warm, is hard-wearing and requires little maintenance. To retain these exceptional properties of natural wood for a long time, wooden flooring is preferably treated with Polyx®-Oil from Osmo. Polyx®-Oils repel dirt and protect wood permanently. At the same time, they allow the wood to breathe and feel great. A further advantage: maintenance is simple.

With very little effort, you can maintain your wooden flooring over generations. If necessary, you can even re-oil and partially renovate flooring without sanding.

DRY CLEANING

Dust and lint can be removed quickly and easily with the green Dust-Mop in the Osmo Opti-Set. It is suitable for all wooden flooring.

DAMP MOPPING

Osmo Spray-Mop makes regular wet care really easy. Cleaner (Spray-Fix) is sprayed via a cartridge on the handle directly onto the floor. As an alternative, you can clean the floor with the Micro-Mop Plush and Wash and Care. Spray-Fix in the Osmo Spray-Mop and Wash and Care contain moisturizing substances, which maintain the beauty of your floor for a long time. Absolutely avoid using all-purpose cleaners.



Opti-Set

Dust-Mop



Wash and Care

Opti-Set

Spray-Mop

INTENSIVE CLEANING AND REFRESHING

Before your wooden flooring becomes dull, you should clean it thoroughly with Osmo Liquid Wax Cleaner. That way you can retain the beautiful look of your floor.

MAINTENANCE

Sometimes even an optimally cared floor will show signs of wear and tear. No problem: floors treated with Polyx®-Oil can be refurbished and re-oiled easily – and also partially. Afterwards your floors will look like new again.



Liquid Wax Cleaner

Liquid Wax Cleaner Spray

Opti-Set

FloorXcenter



Polyx®-Oil Original

Floor Brush with handle

Floor Roller Set

FloorXcenter



More detailed information to help you decide.

DETAILS

YOUR CHOICE





SOLID WOOD FLOORING

Wood in its purest and most beautiful form: solid through and through.



RENOVATION PLANK

Renovation Planks have a low structural height.



CREATIV-FLOORING

All of our flooring products can be delivered with various surface structures and in many colours.



SORTING

SORTING

HARDWOOD

Select

The flooring is very uniform in structure and tone. Pin knots of up to 5 mm may be present.

Natural

Natural colour tones and harmonious knot patterns.

Marked

This grade is much more vivid in tone and structure and contains many typical natural features found in wood such as heartwood and knots, but no sapwood.

Rustic

A lively wood with all the typical wood characteristics, all in all very vibrant.

Life

Lively natural wood grade with sapwood and knots etc.

SOFTWOOD

Grade A

The natural knot pattern determines the overall appearance of the wood and creates a harmonious surface effect.

Grade B

Rustic in character, with a pronounced colouration, knot pattern and typical wood characteristics such as cracks and unsound knots.

Mixed grade A/B

Plane falling, around 60 % grade A and 40 % grade B mixed together (see above).

Wildlife/Woody

Slightly "wilder" than our "rustic"; individual mechanical damages.

QUALITY / SORTING

Osmo flooring is produced as follows:

EN 13629 (solid hardwood planks)

EN 13990 (solid soft/pinewood planks)

Note: Wooden flooring is an entirely natural product.

As such it is susceptible to colour and structural variation; the quantity of typical wood characteristics such as surface cracks, knots etc. also varies according to the wood type and grade you choose.

Despite careful inspection by our expert team of wood professionals, it is impossible to rule out some variation across grades. As long as this does not exceed 5 % of the total quantity of wood ordered, this will not be considered grounds for claims.

"Mistakes" from standing height which are not obvious to the naked eye are not classified as grounds for claims. These are in accordance with general practice in the parquet industry and must be accepted, especially for solid wood.

Climate

The right climate for solid wood and for the own well-being is between 50% and 65% relative humidity at a room temperature of about 20° Celsius. This is to be observed, especially during the heating period, and therefore it may be necessary to set up humidifiers.

WOOD CHARACTERISTICS

Osmo wood flooring

Treated with Osmo Polyx®-Oil has an extremely hard-wearing surface which more than meets the demands placed on it in an average home.

Durability

















Also depends on the hardness of the specific wood. The table shows all the available timber varieties

and their relative hardness. The higher the score (at an average wood moisture of 12 %), the harder and more durable the wood.

Colouration

Light-coloured wood species may darken when exposed to light, dark wood species may lighten over the years.

RELATIVE HARDNESS TABLE

	Wood species	Brinell hardness N/mm ²	Density g/cm ³	Hardness rating
	Jatoba	69	0.95	4
	Tigerwood	60	0.90	4
	Merbau	49	0.85	4
	Kempas	52	0.82	4
	Wenge	44	0.80	4
	Maple	48	0.72	4
	Oak	34	0.71	4
	Beech	34	0.69	3
	Thermo Ash	31	0.60	1
	Ash	38	0.65	3
	Walnut	36	0.65	3
	Oak, smoked	39 – 61	0.69 – 0.96	4
	Larch	25	0.59	2
	Cherry	30	0.58	2
	Pine	19	0.52	2
	Spruce	12	0.47	1

THE GRADE IS THE DECIDING
FACTOR IN THE TOTAL
APPEARANCE OF WOOD.

SOLID WOOD FLOORING // LIGHT DIVERSITY

MAPLE (CANADIAN)



MAPLE CANADIAN *

Grade: select

Untreated

Ref.-no. 32171102

Finished clear satin

Ref.-no. 32171202

Dimensions 21 x 132 mm

Length 1.45 – 2.95 m

Contents 5 Pcs./Pack
175 Pcs./Pallet



MAPLE CANADIAN *

Grade: life

Untreated

Ref.-no. 32171103

Finished clear satin

Ref.-no. 32171203

Dimensions 21 x 132 mm

Length 1,45 – 2,95 m

Contents 5 Pcs./Pack
175 Pcs./Pallet

BEECH



BEECH LIGHTLY STEAMED *

Grade: select

Untreated

Ref.-no. 32175100

Finished clear satin

Ref.-no. 32175200

Dimensions 21 x 132 mm

Length 1,45 – 2,35 m

Contents 5 Pcs./Pack
175 Pcs./Pallet



BEECH LIGHTLY STEAMED *

Grade: life

Untreated

Ref.-no. 32175101

Finished clear satin

Ref.-no. 32175201

Dimensions 21 x 132 mm

Length 1.45 – 2.35 m

Contents 5 Pcs./Pack
175 Pcs./Pallet

ASH (AMERICAN)



ASH AMERICAN *

Grade: select

Untreated

Ref.-no. 32180100

Finished clear satin

Ref.-no. 32180200

Dimensions 21 x 132 mm

Length 1.45 – 2.95 m

Contents 5 Pcs./Pack
175 Pcs./Pallet



ASH AMERICAN *

Grade: life

Untreated

Ref.-no. 32180101

Finished clear satin

Ref.-no. 32180201

Dimensions 21 x 132 mm

Length 1.45 – 2.95 m

Contents 5 Pcs./Pack
175 Pcs./Pallet

OAK (AMERICAN)



OAK AMERICAN *

Grade: select

Untreated

Ref.-no. 32178100

Finished clear satin

Ref.-no. 32178200

Dimensions 21 x 132 mm

Length 1.45 – 2.95 m

Contents 5 Pcs./Pack
175 Pcs./Pallet



OAK AMERICAN *

Grade: life

Untreated

Ref.-no. 32178101

Finished clear satin

Ref.-no. 32178201

Dimensions 21 x 132 mm

Length 1.45 – 2.95 m

Contents 5 Pcs./Pack
175 Pcs./Pallet

* Length: 1.45 – 2.95 m, 30 cm intervals. select: one abutting joint allowed per pack
life: one layer with two abutting joints allowed

** 500 – 2000 / 2200 mm mostly abutting joints

Solid wood flooring

- > T&G on all sides
- > light bevel on all sides
- > WMC approx. 10 % ± 2 %

SOLID WOOD FLOORING // LIGHT DIVERSITY

OAK (EUROPEAN)



OAK EUROPEAN

Grade: select

Untreated

Ref.-no. 32179137

Finished clear gloss

Ref.-no. 32179237

Dimensions 20 x 120 mm
Length 1.20 m (Fixlength)
Contents 5 Pcs./Pack
270 Pcs./Pallet



OAK EUROPEAN **

Grade: natural

Untreated

Ref.-no. 32179110

Finished clear satin

Ref.-no. 32179210

Dimensions 20 x 160 mm
Length 2.00 / 2.20 m
Contents 5 Pcs./Pack
270 Pcs./Pallet



OAK EUROPEAN **

Grade: marked

Untreated

Ref.-no. 32179111

Finished clear satin

Ref.-no. 32179211

Dimensions 20 x 160 mm
Length 2.00 / 2.20 m
Contents 5 Pcs./Pack
270 Pcs./Pallet



OAK EUROPEAN **

Grade: marked

Untreated

Ref.-no. 32179114

Finished clear satin

Ref.-no. 32179214

Dimensions 20 x 180 mm
Length 2.00 / 2.20 m
Contents 5 Pcs./Pack
225 Pcs./Pallet



OAK EUROPEAN **

Grade: rustic

Untreated

Ref.-no. 32179112

Finished clear satin

Ref.-no. 32179212

Dimensions 20 x 160 mm
Length 2.00 / 2.20 m
Contents 5 Pcs./Pack
270 Pcs./Pallet



OAK EUROPEAN **

Grade: rustic

Finished natural matt

Ref.-no. 32179248

Dimensions 20 x 160 mm
Length 2.00 / 2.20 m
Contents 5 Pcs./Pack
270 Pcs./Pallet

NEW



OAK EUROPEAN **

Grade: rustic

Finished white satin

Ref.-no. 32179213

Dimensions 20 x 160 mm
Length 2.00 / 2.20 m
Contents 5 Pcs./Pack
270 Pcs./Pallet



OAK EUROPEAN **

Grade: rustic

Untreated

Ref.-no. 32179115

Finished clear satin

Ref.-no. 32179215

Dimensions 20 x 180 mm
Length 2.00 / 2.20 m
Contents 5 Pcs./Pack
225 Pcs./Pallet



OAK EUROPEAN

Grade: mixed (natural/marked/rustic)

Untreated

Ref.-no. 32179150

Finished clear satin

Ref.-no. 32179250

Dimensions 20 x 160 mm
Length **2.00 m (fixed length)**
Contents 5 Pcs./Pack
240 Pcs./Pallet



OAK EUROPEAN

Grade: mixed (natural/marked/rustic)

Untreated

Ref.-no. 32179151

Dimensions 20 x 160 mm
Length **4.00 m (fixed length)**
Contents 5 Pcs./Pack
240 Pcs./Pallet



OAK EUROPEAN

Grade: mixed (natural/marked/rustic)

Untreated

Ref.-no. 32179152

Finished clear satin

Ref.-no. 32179252

Dimensions 27 x 180 mm
Length **2.00 m (fixed length)**
Contents 2 Pcs./Pack
140 Pcs./Pallet



OAK EUROPEAN

Grade: mixed (natural/marked/rustic)

Untreated

Ref.-no. 32179153

Dimensions 27 x 180 mm
Length **4.00 m (fixed length)**
Contents 2 Pcs./Pack
140 Pcs./Pallet

SOLID WOOD FLOORING // LIGHT DIVERSITY

SPRUCE (NORDIC)



SPRUCE NORDIC*
Grade A

Untreated

Ref.-no. 32101100

Dimensions 21 x 112 mm
Length 1.45 – 4.15 m
Contents 6 Pcs./Pack
192 Pcs./Pallet

Finished clear satin

Ref.-no. 32101200

Dimensions 21 x 112 mm
Length 1.45 – 2.95 m
Contents 6 Pcs./Pack
192 Pcs./Pallet



SPRUCE NORDIC*
Grade A

Untreated

Ref.-no. 32101101

Dimensions 21 x 137 mm
Length 1.45 – 4.15 m
Contents 5 Pcs./Pack
175 Pcs./Pallet

Finished clear satin

Ref.-no. 32101201

Dimensions 21 x 137 mm
Length 1.45 – 2.95 m
Contents 5 Pcs./Pack
175 Pcs./Pallet



SPRUCE NORDIC*
Grade A

Untreated

Ref.-no. 32101102

Dimensions 27 x 137 mm
Length 1.45 – 4.15 m
Contents 4 Pcs./Pack
224 Pcs./Pallet

Finished clear satin

Ref.-no. 32101202

Dimensions 27 x 137 mm
Length 1.45 – 2.95 m
Contents 4 Pcs./Pack
224 Pcs./Pallet



SPRUCE NORDIC*
Grade B

Untreated

Ref.-no. 32101400

Dimensions 21 x 112 mm
Length 1.45 – 4.15 m
Contents 6 Pcs./Pack
192 Pcs./Pallet

LARCH (SIBIRIAN)



SPRUCE NORDIC*
Grade B

Untreated

Ref.-no. 32101401

Dimensions 21 x 137 mm
Length 1.45 – 4.15 m
Contents 5 Pcs./Pack
175 Pcs./Pallet



SPRUCE NORDIC*
Grade B

Untreated

Ref.-no. 32101402

Dimensions 27 x 137 mm
Length 1.45 – 4.15 m
Contents 4 Pcs./Pack
224 Pcs./Pallet



LARCH SIBIRIAN
Grade B/C: woody

Finished / brushed surface

Ref.-no. 32173210

Dimensions 20 x 137 mm
Length 1.98 m (Fixlength)
Contents 6 Pcs./Pack
192 Pcs./Pallet



LARCH SIBIRIAN
Grade B/C: woody

Finished / brushed surface

Ref.-no. 32173212

Dimensions 27 x 137 mm
Length 1.98 m (Fixlength)
Contents 4 Pcs./Pack
128 Pcs./Pallet



LARCH SIBIRIAN
Grade A

Untreated

Ref.-no. 32173107

Finished clear satin

Ref.-no. 32173207

Dimensions 20 x 137 mm
Length 1.98 m (Fixlength)
Contents 6 Pcs./Pack
192 Pcs./Pallet



LARCH SIBIRIAN
Grade B

Untreated

Ref.-no. 32173108

Finished clear satin

Ref.-no. 32173208

Dimensions 20 x 137 mm
Length 1.98 m (Fixlength)
Contents 6 Pcs./Pack
192 Pcs./Pallet



LARCH SIBIRIAN
Grade A/B

Untreated

Ref.-no. 32173111

Finished clear satin

Ref.-no. 32173211

Dimensions 27 x 137 mm
Length 1.98 m (Fixlength)
Contents 4 Pcs./Pack
128 Pcs./Pallet



LARCH SIBIRIAN
Grade B/C: wildlife

Untreated

Ref.-no. 32173109

Finished clear satin

Ref.-no. 32173209

Dimensions 20 x 137 mm
Length 1.98 m (Fixlength)
Contents 6 Pcs./Pack
192 Pcs./Pallet

SOLID WOOD FLOORING // LIGHT DIVERSITY

PINE (NORDIC)



PINE NORDIC*
Grade A

Untreated	
Ref.-no.	32111107
Dimensions	21 x 112 mm
Length	1.45 – 4.15 m
Contents	6 Pcs./Pack 192 Pcs./Pallet



PINE NORDIC*
Grade A

Finished clear satin	
Ref.-no.	32111207
Dimensions	21 x 112 mm
Length	1.45 – 2.95 m
Contents	6 Pcs./Pack 192 Pcs./Pallet



PINE NORDIC*
Grade A

Untreated	
Ref.-no.	32111109
Dimensions	21 x 137 mm
Length	1.45 – 4.15 m
Contents	5 Pcs./Pack 175 Pcs./Pallet

Finished clear satin	
Ref.-no.	32111209
Dimensions	21 x 137 mm
Length	1.45 – 2.95 m
Contents	5 Pcs./Pack 175 Pcs./Pallet



PINE NORDIC*
Grade A

Untreated	
Ref.-no.	32111110
Dimensions	27 x 137 mm
Length	1.45 – 4.15 m
Contents	4 Pcs./Pack 224 Pcs./Pallet

Finished clear satin	
Ref.-no.	32111210
Dimensions	27 x 137 mm
Length	1.45 – 2.95 m
Contents	4 Pcs./Pack 224 Pcs./Pallet



PINE NORDIC*
Grade A

Untreated	
Ref.-no.	32111111
Finished clear satin-matt	
Ref.-no.	32111211
Dimensions	26 x 180 mm
Length	3.25 – 4.15 m
Contents	3 Pcs./Pack 90 Pcs./Pallet



PINE NORDIC*
Grade B

Untreated	
Ref.-no.	32111407
Dimensions	21 x 112 mm
Length	1.45 – 4.15 m
Contents	6 Pcs./Pack 192 Pcs./Pallet



PINE NORDIC*
Grade B

Untreated	
Ref.-no.	32111409
Dimensions	21 x 137 mm
Length	1.45 – 4.15 m
Contents	5 Pcs./Pack 175 Pcs./Pallet



PINE NORDIC*
Grade B

Untreated	
Ref.-no.	32111410
Dimensions	27 x 137 mm
Length	1.45 – 4.15 m
Contents	4 Pcs./Pack 224 Pcs./Pallet



PINE NORDIC*
Grade B

Untreated	
Ref.-no.	32111411
Dimensions	26 x 180 mm
Length	3.25 – 4.15 m
Contents	3 Pcs./Pack 90 Pcs./Pallet



PINE NORDIC*
Grade A/B

Untreated	
Ref.-no.	32111112
Dimensions	32 x 180 mm
Length	3.25 – 4.15 m
Contents	2 Pcs./Pack 80 Pcs./Pallet

* Length: 1.45 – 2.95 m or 4.15 m
30 cm intervals no abutting joint

Solid wood flooring

- > T&G on all sides
- > light bevel on all sides
- > WMC approx. 10 % ± 2 %

SOLID WOOD FLOORING // ROOM LENGTHS

LARCH (SIBIRIAN)



LARCH SIBIRIAN

Grade A/B

Untreated

Ref.-no. 32173120

Dimensions 20 x 137 mm

Length 4.00 m (Fixlength)

Contents 6 Pcs./Pack
192 Pcs./Pallet



LARCH SIBIRIAN

Grade A/B

Untreated

Ref.-no. 32173121

Dimensions 27 x 137 mm

Length 4.00 m (Fixlength)

Contents 4 Pcs./Pack
128 Pcs./Pallet

SPRUCE (NORDIC)



SPRUCE NORDIC*

Grade A

Untreated

Ref.-no. 32101103

Dimensions 21 x 112 mm

Length 3.00 – 5.10 m

Contents 4 Pcs./Pack
144 Pcs./Pallet



SPRUCE NORDIC*

Grade A

Untreated

Ref.-no. 32101104

Dimensions 27 x 137 mm

Length 3.60 – 5.40 m

Contents 3 Pcs./Pack
84 Pcs./Pallet

PINE (NORDIC)



SPRUCE NORDIC*

Grade B

Untreated

Ref.-no. 32101403

Dimensions 21 x 112 mm

Length 3.00 – 5.10 m

Contents 4 Pcs./Pack
144 Pcs./Pallet



SPRUCE NORDIC*

Grade B

Untreated

Ref.-no. 32101404

Dimensions 27 x 137 mm

Length 3.60 – 5.40 m

Contents 3 Pcs./Pack
84 Pcs./Pallet



PINE NORDIC*

Grade A

Untreated

Ref.-no. 32111113

Dimensions 27 x 137 mm

Length 3.60 – 5.10 m

Contents 3 Pcs./Pack
84 Pcs./Pallet



PINE NORDIC*

Grade B

Untreated

Ref.-no. 32111413

Dimensions 27 x 137 mm

Length 3.60 – 5.10 m

Contents 3 Pcs./Pack
84 Pcs./Pallet

SOLID WOOD FLOORING ROOM LENGTHS

Treat yourself to the wonderful feeling of solid wood flooring in its most natural form. The three wood species: Pine, Spruce and Larch bring Scandinavian flair into your home. This Nordic look continues endlessly from wall to wall without any joints. Thus you receive the fillet from a tree trunk, so to speak. The planks need to be attached with screws and are not suitable for underfloor heating.

- > Pine, Spruce, Larch
- > T&G only on the longitudinal edge
- > Long lengths from 3.00–5.40 m
- > Untreated

* Length: 3.00–5.40 m, 30 cm intervals no abutting joints

Room lengths

- > T&G only on longitudinal edge
- > light longitudinal bevel
- > WMC approx. 10–12 %

Tip: We recommend Osmo Polyx® Oil for the long term protection of the surface.



SOLID WOOD FLOORING // RED // DARK ELEGANCE

KEMPAS



KEMPAS*
Grade: select

Untreated

Ref.-no. 32151100

Finished clear satin

Ref.-no. 32151200

Dimensions 21 x 111 mm

Length 1.45 – 2.35 m

Contents 6 Pcs./Pack
192 Pcs./Pallet

MERBAU



MERBAU*
Grade: select

Untreated

Ref.-no. 32155100

Finished clear satin

Ref.-no. 32155200

Dimensions 21 x 111 mm

Length 1.45 – 2.35 m

Contents 6 Pcs./Pack
192 Pcs./Pallet

CHERRY (AMERICAN)



CHERRY AMERICAN*
Grade: select

Untreated

Ref.-no. 32181100

Finished clear satin

Ref.-no. 32181200

Dimensions 21 x 132 mm

Length 1.45 – 2.95 m

Contents 5 Pcs./Pack
175 Pcs./Pallet



CHERRY AMERICAN*
Grade: life

Untreated

Ref.-no. 32181101

Finished clear satin

Ref.-no. 32181201

Dimensions 21 x 132 mm

Length 1.45 – 2.95 m

Contents 5 Pcs./Pack
175 Pcs./Pallet

JATOBA



JATOBA*
Grade: select

Untreated

Ref.-no. 32153101

Finished clear satin

Ref.-no. 32153201

Dimensions 21 x 132 mm

Length 1.45 – 2.95 m

Contents 5 Pcs./Pack
175 Pcs./Pallet

TIGERWOOD



TIGERWOOD*
Grade: select

Untreated

Ref.-no. 32152100

Finished clear satin


Ref.-no. 32152200

Dimensions 21 x 132 mm

Length 1.45 – 2.95 m

Contents 5 Pcs./Pack
175 Pcs./Pallet

THERMO ASH



THERMO ASH**
Grade: natural thermo treated

Finished in Cognac matt

Ref.-no. 32177202

Dimensions 20 x 138 mm

Length 2.40 m

Contents 5 Pcs./Pack
175 Pcs./Pallet

* Length: 1,45 – 2,95 m, 30 cm intervals
select: one abutting joint allowed per pack
life: one layer with two abutting joints allowed

** mostly abutting joints

Solid wood flooring

- > T&G on all sides
- > light bevel on all sides
- > WMC approx. 10 % ± 2 %

OAK (EUROPEAN)



OAK SMOKED**
Grade: marked no sapwood

Untreated

Ref.-no. 32179134

Finished clear satin

Ref.-no. 32179234

Dimensions 21 x 137 mm

Length 2.16 m

Contents 6 Pcs./Pack
192 Pcs./Pallet

WENGE



WENGE
Grade: select

Untreated

Ref.-no. 32154100

Finished clear satin

Ref.-no. 32154200

Dimensions 20 x 137 mm

Length 1.48 m (Fixlength)

Contents 6 Pcs./Pack
192 Pcs./Pallet

WALNUT (AMERICAN)



WALNUT AMERICAN*
Grade: select

Untreated

Ref.-no. 32156100

Finished clear satin

Ref.-no. 32156200

Dimensions 21 x 132 mm

Length 1.45 – 2.95 m

Contents 5 Pcs./Pack
175 Pcs./Pallet



WALNUT AMERICAN*
Grade: life

Untreated

Ref.-no. 32156101

Finished clear satin

Ref.-no. 32156201

Dimensions 21 x 132 mm

Length 1.45 – 2.95 m

Contents 5 Pcs./Pack
175 Pcs./Pallet



RENOVATION PLANK

NEW

OAK (EUROPEAN)



OAK EUROPEAN

Grade: select

Untreated

Ref.-no. 32179136

Finished clear satin

Ref.-no. 32179236

Dimensions 15 x 120 mm

Length 1.20 m (Fixlength)

Contents 8 Pcs./Pack

504 Pcs./Pallet



OAK EUROPEAN **

Grade: select

Untreated

Ref.-no. 32179100

Finished clear satin

Ref.-no. 32179200

Dimensions 15 x 130 mm

Length 1.80 m

Contents 8 Pcs./Pack

448 Pcs./Pallet



OAK EUROPEAN **

Grade: natural

Untreated

Ref.-no. 32179101

Finished clear satin

Ref.-no. 32179201

Dimensions 15 x 130 mm

Length 1.80 m

Contents 8 Pcs./Pack

448 Pcs./Pallet



EICHE EUROPÄISCH **

Sortierung: natur

Finished white^{Plus} satin

Ref.-no. 32179207

Dimensions 15 x 130 mm

Length 1.80 m

Contents 8 Pcs./Pack

448 Pcs./Pallet



OAK EUROPEAN **

Grade: marked

Untreated

Ref.-no. 32179102

Finished clear satin

Ref.-no. 32179202

Dimensions 15 x 130 mm

Length 1.80 m

Contents 8 Pcs./Pack

448 Pcs./Pallet



OAK EUROPEAN **

Grade: rustic

Untreated

Ref.-no. 32179103

Finished clear satin

Ref.-no. 32179203

Dimensions 15 x 130 mm

Length 1.80 m

Contents 8 Pcs./Pack

448 Pcs./Pallet



OAK EUROPEAN **

Grade: rustic

Finished white satin

Ref.-no. 32179204

Dimensions 15 x 130 mm

Length 1.80 m

Contents 8 Pcs./Pack

448 Pcs./Pallet



OAK EUROPEAN **

Grade: marked no sapwood, smoked

Untreated

Ref.-no. 32179133

Finished clear satin

Ref.-no. 32179233

Dimensions 15 x 137 mm

Length 2.16 m

Contents 8 Pcs./Pack

256 Pcs./Pallet

ASH (EUROPEAN)



ASH EUROPEAN **

Grade: select

Untreated

Ref.-no. 32177100

Finished clear satin

Ref.-no. 32177200

Dimensions 15 x 130 mm

Length 2.00 m

Contents 8 Pcs./Pack

448 Pcs./Pallet



ASH EUROPEAN **

Grade: select

Finished white satin

Ref.-no. 32177201

Dimensions 15 x 130 mm

Length 2.00 m

Contents 8 Pcs./Pack

448 Pcs./Pallet



LARCH SIBERIAN

Grade A/B

Untreated

Ref.-no. 32173106

Finished clear satin

Ref.-no. 32173206

Dimensions 15 x 135 mm

Length 1.98 m (Fixlength)

Contents 8 Pcs./Pack

256 Pcs./Pallet

** 500–1800 mm or 2000 mm
mostly abutting joints

Renovation Plank

- > T&G on all sides
- > light bevel on all sides
- > WMC approx. 10 % ± 2 %

PINE (NORDIC)



PINE NORDIC
Grade A

Untreated

Ref.-no. 32111101

Dimensions 15 x 111 mm
Length 1.75 m (Fixlength)
Contents 8 Pcs./Pack
448 Pcs./Pallet



PINE NORDIC
Grade A

Finished clear satin

Ref.-no. 32111201

Dimensions 15 x 111 mm
Length 1.75 m (Fixlength)
Contents 8 Pcs./Pack
448 Pcs./Pallet



PINE NORDIC
Grade A

Finished clear nature matt

Ref.-no. 32111202

Dimensions 15 x 111 mm
Length 1.75 m (Fixlength)
Contents 8 Pcs./Pack
256 Pcs./Pallet

PINE (NORDIC) COLOUR



PINE NORDIC
Grade A

Finished Fog matt

Ref.-no. 32111203

Dimensions 15 x 111 mm
Length 1.75 m (Fixlength)
Contents 8 Pcs./Pack
256 Pcs./Pallet



PINE NORDIC
Grade A

Finished Canyon matt

Ref.-no. 32111204

Dimensions 15 x 111 mm
Length 1.75 m (Fixlength)
Contents 8 Pcs./Pack
256 Pcs./Pallet



PINE NORDIC
Grade A

Finished Stone matt

Ref.-no. 32111205

Dimensions 15 x 111 mm
Length 1.75 m (Fixlength)
Contents 8 Pcs./Pack
256 Pcs./Pallet



PINE NORDIC
Grade A

Finished Deep Forest matt

Ref.-no. 32111206

Dimensions 15 x 111 mm
Length 1.75 m (Fixlength)
Contents 8 Pcs./Pack
256 Pcs./Pallet

TIP

SIKA ACOUBOND-SYSTEM

Footfall sound dampening, 2-part system for the simple adhesion of renovation and solid wood floorboards, among other things, on floating dry screed (e.g. Fermacell screed elements).

The **Sika Acoubond-System** consists of the sound absorbing and solvent-free 1-component adhesive **SikaBond -52 Parquet** and the foam mat **SikaLayer 03**.

- > Footfall sound improvement up to 16 dB (acc. DIN 52 210)
- > Reduced walking noise
- > Simple and secure installation through a fixed system
- > Low glue consumption
- > Very wide adhesion spectrum on various substrates

more Details
on page 68

AS INDIVIDUAL AS YOU ARE – YOUR POSSIBILITIES

Is there anything better than being able to define your own style? The solid wood Creativ-Flooring range from Osmo presents almost unlimited possibilities for individuality. 5 different wood species, 5 different surface structures and 25 colour tones plus clear finishes are available for you to choose from. You can even select the gloss level of the clear top coat, which protects the surface.

How much will it cost? Simply choose and tick your choice and add the costs together.

HOW IT WORKS:

1. CHOOSE YOUR FAVOURITE WOOD SPECIES

2. YOUR SURFACE

Smooth, brushed, aged, sawn or scraped (you can also combine structures e.g. brushed with aged)

3. CLEAR, COLOUR OR COLOUR WITH EFFECT?

Clear: Simply choose the gloss level. The base coat is included in the price.

Colour: Choose the colour and gloss level.

Colour with Effect: Choose the colour and desired effect (White, Silver or Gold) – then the desired gloss level.

1. THE WOOD



☐ OAK



☐ ASH



☐ SPRUCE



☐ PINE



☐ LARCH

WOOD

2. THE SURFACE (shown on Oak)



☐ SMOOTH (STANDARD)

Price/m²



☐ BRUSHED

Price/m²



☐ AGED

Price/m²



☐ SAWN

Price/m²



☐ SCRAPED

Price/m²

+ SURFACE

+ 2. SURFACE

SMOOTH

Sanding removes any rough or uneven areas leaving a smooth surface.

BRUSHED

Created by removing the softer fibres of the wood, light grooves are visible and can be felt – a pleasant underfoot surface.

AGED

Each plank has various marks which create a "used look" and natural antique optic.

SAWN

A special sanding technique lends a smooth surface the look of freshly sawn wood.

SCRAPED

Similar to a hand-planed surface and the strongest structure in the Creativ-Flooring range, reflects the charm of traditional woodwork.

Creativ-Flooring is produced on order, please calculate a minimum of 5% waste when ordering.

The colours shown in the catalogue are photos, the colour may appear differently depending on wood species and surface structure. To get a more precise idea of the product you can order an original sample (approx. 30 cm long) from your trusted Osmo dealer.

COLOUR AND SURFACES

3. COLOUR / COLOUR WITH EFFECT / CLEAR*



☐ MAPLE



☐ BEECH



☐ CHERRY



☐ MAHOGANY



☐ COGNAC



☐ WALNUT



☐ EBONY



☐ OAK



☐ LIGHT OAK



☐ OAK ANTIQUE



☐ SILK



☐ FJORD



☐ BAMBOO



☐ PEBBLE



☐ GREY BEIGE



☐ BLACK



☐ STEEL GREY



☐ AUBERGINE



☐ FERN GREEN



☐ GRAPHITE



☐ OCEAN BLUE



☐ CORAL RED



☐ GRANITE GREY



☐ SILK GREY



☐ WHITE

ALL COLOURS

Price/m²

Pigmented base coat + clear top coat (gloss level)

COLOUR (INCL. GLOSS LEVEL)

COLOUR + EFFECT WHITE, SILVER OR GOLD

Price/m²

Pigmented base coat + clear top coat (gloss level)

COLOUR + EFFECT (INCL. GLOSS LEVEL)

Example on Steel Grey



Example on Black



Example on Oak Antique



☐ EFFECT WHITE

☐ EFFECT SILVER

☐ EFFECT GOLD

CLEAR*

Price/m²

Pigmented base coat + clear top coat (gloss level)

CLEAR (INCL. GLOSS LEVEL)



☐ CLEAR

CHOICE GLOSS LEVEL

☐ MATT


☐ SEMI-MATT

☐ SATIN

☐ GLOSS

ACCESSORIES

INSTALLATION TOOLS / MATERIAL



THE "THIRD HAND"

An ingenious tool for installing solid wood flooring

Ref.-no. 799 00 285



PONOL SUPER 3 LEIM

For gluing tongue and groove joints.
E1 quality.
420 g bottle

Ref.-no. 799 00 281



FIXING SCREWS

For screwing into solid wood flooring.
No pre-drilling or countersinking required. Pack contains 200 Pcs.

for 15 mm Renovation Plank:

3,2 x 40 mm

Ref.-no. 799 00 361

for 20–22 mm hardwood:

3,2 x 50 mm

Ref.-no. 799 00 362

for 21 mm softwood:

4,2 x 45 mm

Ref.-no. 799 00 363

for 26–32 mm softwood:

4,2 x 70 mm

Ref.-no. 799 00 364

MATERIAL FOR FULL SURFACE ADHESION



SIKA BOND 54 PARQUET

1-Component, solvent-free, elastic adhesive especially for solid wood and parquet flooring
1 tin (13 kg) for approx. 13–18 m²

Ref.-no. 799 00 305



SIKA PRIMER-MB

2-Component, solvent-free
Epoxy resin primer
300–500 g/m²
depending on surface absorption

Ref.-no. 799 00 269



SIKA PRIMER-MR FAST

Multi component, solvent-free
Epoxy resin primer
100–200 g/m²
depending on surface absorption

Ref.-no. 799 00 304

SIKA ACOUBOND-SYSTEM



SIKA ACOUBOND-SYSTEM

2-part, sound absorption material for the adhesion of solid wood onto dry screed (base plates, OSB), consists of

a) Parquet underlay Sika Layer-03

1 Roll = 25 m²

Thickness 3,0 mm, Width 1,50 m

Ref.-no. 799 00 249



b) Sika Bond -52 Parquet

Solvent-free, elastic adhesive;
1 Pack = 600 ml,
20 Packs per box;
per roll Sika Layer-03 (25 m²)

requires 1 box

Ref.-no. 799 00 293

SUBCONSTRUCTION /-UNDERLAY



CATSTEP

Floor height adapter for up to 3,5 cm difference in height,
weight bearing 500 kg per piece;
approx. 4-5 pieces required per m²
Box contains 100 pieces

Ref.-no. 799 00 226

MATERIAL FOR FLOATING INSTALLATION



ELASTILON® BASIC

Chemically crosslinked Polyethylene with adhesive layer
FCKW free, 1 Roll = 10 m²,
Density approx. 30 kg/m³, Thickness 3 mm,
Width 100 cm


Ref.-no. 799 00 388



ELASTILON® STRONG

Chemically crosslinked Polyethylene with adhesive layer
FCKW free, 1 Roll = 10 m²,
Density approx. 50 kg/m³, Thickness 3 mm,
Width 100 cm

Ref.-no. 799 00 389

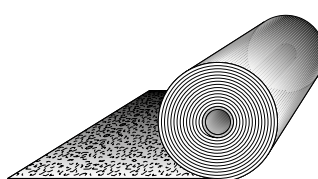

ROLL CORK

Levelling and sound absorption insulation
Sound absorption: approx. 17 dB
Density approx. 220 kg/m³, Thickness: 2,0 mm,
Width 100 cm

1 Roll = 10 m²

Ref.-no. 799 00 097

INSTALLATION TIPS



SCREWING TO WOODEN BEAM SUB CONSTRUCTION The more traditional method, made easy with the ingenious "Catstep" floor adjustment system. The adjustable feet level out the beams, improve the impact sound reduction and allow room for cables and pipes under the floor. For all solid wood flooring as of 20 mm thickness.



SCREWING TO CHIPBOARD Ideal for properties with floor substrates constructed with wooden beams. The boards can be quickly and easily installed together with impact reduction insulation. For all solid wood flooring as of 20 mm thickness.



SCREWING TO AN EXISTING WOODEN FLOOR New wooden flooring can easily be installed on top of old flooring, a layer of impact reduction material should however definitely be laid first. The new flooring must be installed in the opposite direction to the old floor. For all solid wood flooring as of 15 mm thickness.



ALL OVER ADHESION A method which is becoming more and more popular. An advantage of this is the reduced impact sound, low required installation height, fewer cracks and a better level of heat transfer. Elastic based glues ensure that the floor can still work. For all wooden floors.









FLOATING ADHESION A good method for difficult installation areas and difficult to calculate substrates. Sound absorbing, minimal installation height and suitable for all wooden flooring.

OVERVIEW

PRODUCT OVERVIEW FLOORING				Installation								
Article	Species/ Grade	Dimensions in mm	Length in m	Screw fixation on			Full surface adhesion		Floating with		Special installation	
				OSB/Base plate	Old wooden floors	Beams	Full surface	AcouBond	Elastilon® Basic	Elastilon® Strong	On underfloor heating	Bathrooms
RENOVATION PLANK		15 x 130	1.80	•	•		•	•		•	•	
		15 x 135	1.98	•	•		•	•		•	•	•
		15 x 130	2.00	•	•		•	•		•		
		15 x 137	2.16	•	•					•		
		15 x 111	1.75				•	•		•		
SOLID WOOD FLOORING HARDWOOD		21 x 132	1.45–2.95	•	•	•	•	•		•		
		21 x 132	1.45–2.35	•	•	•	•	•		•		
		21 x 132	1.45–2.95	•	•	•	•	•	•	•		
		20 x 120	1.20	•	•	•	•	•	•	•	•	
		20 x 160	2.00/2.20	•	•	•	•	•	•	•	•	
			4.00	•	•	•						
		20 x 180	2.00/2.20	•	•	•	•	•	•	•	•	
		27 x 180	4.00	•	•	•						
		21 x 137	2.16	•	•	•				•		
		21 x 132	1.45–2.95	•	•	•	•	•	•	•		
		21 x 132	1.45–2.95	•	•	•	•	•	•	•		
		21x 132	1.45–2.95	•	•	•	•	•		•		
		21 x 111	1.45–2.95	•	•	•	•	•		•		
		21 x 111	1.45–2.95	•	•	•	•	•	•	•		•
		20 x 138	2.40	•	•	•	•	•	•	•	•	•
		21 x 132	1.45–2.95	•	•	•	•	•		•		
		21 x 132	1.45–2.95	•	•	•	•	•	•	•		
		20 x 137	1.48	•	•	•	•	•		•		•

PRODUCT OVERVIEW FLOORING

PRODUCT OVERVIEW FLOORING				Installation								
				Screw fixation on			Full surface adhesion		Floating with		Special installation	
Article	Species/ Grade	Dimensions in mm	Length in m	OSB/Base plate	Old wooden floors	Beams	Full surface	AcouBound	Elastilon® Basic	Elastilon® Strong	On underfloor heating	Bathrooms
SOLID WOOD FLOORING SOFTWOOD		21 x 112	1.45–2.95	•	•	•	•	•		•		
			3.25–4.15	•	•	•						
		21 x 137	1.45–2.95	•	•	•	•	•	•	•		
			3.25–4.15	•	•	•						
		27 x 137	1.45–4.15	•	•	•						
		complete	1.45–4.15	•	•	•						
		21 x 112	1.45–2.95	•	•	•	•	•		•		
			3.25–4.15	•	•	•						
		21 x 137	1.45–2.95	•	•	•	•	•	•	•		
			3.25–4.15	•	•	•						
		27 x 137	1.45–4.15	•	•	•						
		26 x 180	3.25–4.15	•	•	•						
		32 x 180	3.25–4.15	•	•	•						
		complete	1.45–4.15	•	•	•						
		20 x 137	1.98	•	•	•	•	•	•	•	•	•
		20 x 137	4.00	•	•	•						
		27 x 137	1.98	•	•	•						
		27 x 137	4.00	•	•	•						

OUR PRODUCTS

> TIMBER CLADDING

Cladding profiles
Shingles
Framing wood

> FLOORING

Solid wood flooring
Creativ-Flooring

> WOOD FINISHES

For the interior and exterior
Wood protection and care

> INTERIOR WOOD

Solid wood profiles
Framing wood
Planed timber

> EDGE GLUED PANELS

Solid wood panels
Work surfaces
Furniture doors

> MOULDINGS

Skirting boards
Functional mouldings
Decorative mouldings

> DECKING

Wood and BPC
Decking tiles

> SCREENS

Wood and BPC
Fences

Osmo Holz und Color GmbH & Co. KG

Affhüppen Esch 12
D-48231 Warendorf

PO Box 110161
D-48203 Warendorf

Tel +49 (0)2581/922-100
Fax +49 (0)2581/922-200

www.osmo.de/en
info@osmo.de

Your local Osmo dealer:

